




## DIMENSIONS



## ACCESSORIES

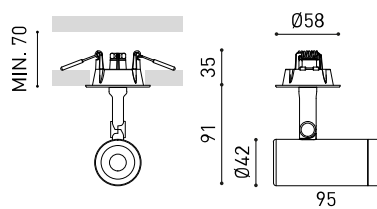

HIGH CHROMATIC LED



HONEYCOMB LOUVER



ANTI-GLARE SCREEN



LINEAR FILTER

## AWARDS



reddot winner 2024  
lighting design

## PRODUCT

|           |                                         |
|-----------|-----------------------------------------|
| Name      | COCO RECESSED FLOOD DIM PH.CUT 3500K NT |
| Reference | A5300533NT                              |
| Color     | Textured black                          |
| RAL       | 9005                                    |
| Category  | CEILING RECESSED                        |

## LIGHT SOURCE

|                        |                                  |
|------------------------|----------------------------------|
| Type                   | LED                              |
| Gross luminous flux    | 1310 lm                          |
| Colour temperature     | 3500 K - Other K, please consult |
| Chromatic stability    | MacAdam Step 2                   |
| Colour Rendering Index | CRI>90                           |
| Power                  | 8,7 W                            |
| Current                | 500 mA                           |
| Efficacy               | 150 lm/W                         |
| LED lifespan           | L80B10 >66.000h                  |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |     |
|---------------------|-----|
| Lighting efficiency | 86% |
| Light beam angle    | 48° |

## LIGHTING FIXTURE | ELECTRICAL DATA


|                             |                                       |
|-----------------------------|---------------------------------------|
| Driver                      | Included                              |
| Power values of the system  | 11,73 W                               |
| Frequency                   | 50/60 Hz                              |
| Dimming                     | Phase Cut - Other DIM, please consult |
| Electrical insulation class | □                                     |

## OTHER DATA


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Sealing              | IP20                                                        |
| Wireless control     | Please Consult                                              |
| Recess measurements  | Ø50 mm                                                      |
| Swivel angle         | 90°                                                         |
| Rotation angle       | 350°                                                        |
| Weight               | 333 g                                                       |
| Packaged weight      | 425 g                                                       |
| Packaging dimensions | 194 x 182 x 704 mm                                          |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

A lightweight and powerful solution. Coco is a spotlight with a qualitative and uniform light distribution and provides great freedom of light emissions with four opening angles -flood, medium, spot and superspot - a 360° rotation and a 90° tilt. With an exceptional lm/W ratio, it can be fitted with various accessories: anti-glare honeycomb and anti-glare screen, which reduce glare to facilitate visual comfort, and the linear filter, which sets a linear light distribution. Coco invites one to interact with the light through a version with integrated dimmer, enabling one to adjust the desired intensity in each luminaire. Its tunable white version replicates the effects of natural light by regulating the intensity and colour temperature.

POLAR DIAGRAM

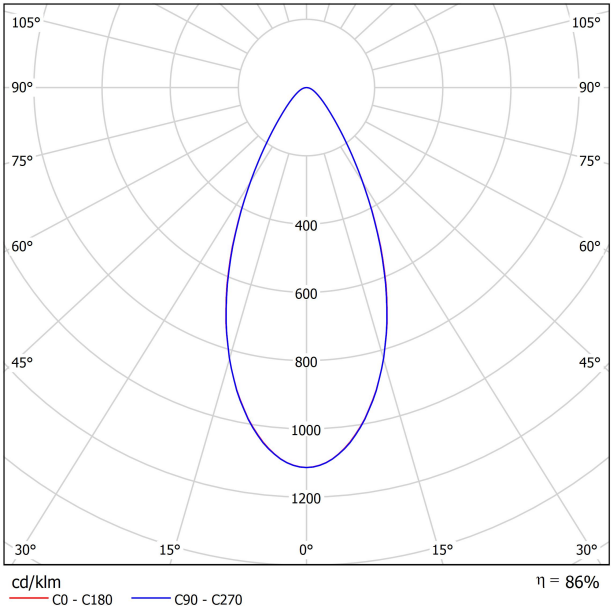

CONICAL DIAGRAM

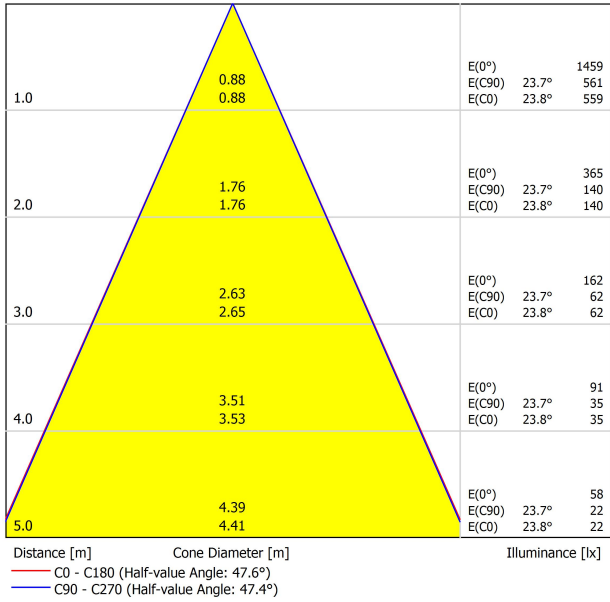

# HIGH CHROMATIC LED

ARKOSLIGHT®


FOR COMMERCIAL PRODUCT SHOWCASING

| Vivid Model<br>Colour Temperature | 2700K | 3000K | 3500K | 4000K | Light Pink |
|-----------------------------------|-------|-------|-------|-------|------------|
| 📖 Reading                         |       |       | •     | •     |            |
| 🥕 Fruits & Vegetables             |       | •     | •     |       |            |
| 🍰 Bakery                          | •     |       |       |       |            |
| 👤 Retail                          |       | •     | •     |       |            |
| 💄 Cosmetics                       |       |       | •     | •     |            |
| 🥩 Meat                            |       |       |       |       | •          |
| 🐟 Fish                            |       |       |       | •     |            |
| 🐠 Seafood                         |       |       |       | •     | •          |




For some of its products, Arkoslight offers the possibility to provide them with a special LED, designed to create an illumination focused on visually promoting goods or products for commercial purposes. It is a high chromaticity LED, capable of identifying the colour shades that produce a positive psychological perception of the illuminated object.

This special LED lighting source offers a much more attractive and intense colour range than a conventional LED, besides being much wider. Technically, this is possible thanks to a special LED setting that includes a «special saturation parameter», capable of highlighting the objects colours and materials in such a way that they seem more attractive within the visible light spectrum. To achieve this performance, in each case, the appropriate diode and specific phosphor coating are carefully selected.




|           |                             |
|-----------|-----------------------------|
|           | PRODUCT                     |
| Model     | Anti-glare Honeycomb Louver |
| Reference | A498-90-00   WT   NT        |
| Category  | Accessories                 |
|           | NOT SOLD SEPARATELY         |






| PRODUCT             |                      |
|---------------------|----------------------|
| Model               | Anti-glare Screen    |
| Reference           | A498-90-01   WT   NT |
| Category            | Accessories          |
| NOT SOLD SEPARATELY |                      |





| PRODUCT                 |                      |
|-------------------------|----------------------|
| Model                   | Linear Filter        |
| Reference               | A498-90-02   WT   NT |
| Category                | Accessories          |
| NOT SOLD SEPARATELY     |                      |
| SUITABLE FOR BEAM ≤ 34° |                      |



## DRIVER

|            |                            |
|------------|----------------------------|
| 0000-95-39 | DRIVER 10W 500mA PHASE CUT |
|------------|----------------------------|

## PHASE CUT DIMMERS TESTED FOR COMPATIBILITY:

| Brand / Manufacturer | Model number  | Dimming Type  |
|----------------------|---------------|---------------|
| Niko                 | 310-0190X     | Trailing edge |
| Jung                 | LB-Management | Trailing edge |
| HZC Electric         | AU-P3         | Trailing edge |
| Philips              | SED-200A      | Trailing edge |
| Merten/Schneider     | SBD315RC      | Trailing edge |
| Etman                | ETM327        | Trailing edge |
| Etman                | ETM329        | Trailing edge |
| Casambi              | CBU-TED       | Trailing edge |

THE PARTICULAR CONDITIONS OF EACH INSTALLATION AND THE SPECIFICATIONS AND CONDITIONS OF USE OF EACH REGULATOR, MAY DIFFER FROM THOSE CONSIDERED IN THE COMPATIBILITY TESTING, AND AFFECT ITS PERFORMANCE IN SAID INSTALLATION.

FOR MORE INFO, PLEASE CONSULT



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

