




Dimensions



Name	REC ASYMMETRIC DIM DALI/PUSH 2700K NT
Reference	A5520020NT
Color	Textured black
RAL	9005
Category	WALL

PRODUCT

Name	REC ASYMMETRIC DIM DALI/PUSH 2700K NT
Reference	A5520020NT
Color	Textured black
RAL	9005
Category	WALL

Type	LED
Gross luminous flux	5510 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	39,8 W
Current	400 mA
LED lifespan	L80B10 >72.000h
Energy efficiency class	E

LIGHT SOURCE

Type	LED
Gross luminous flux	5510 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	39,8 W
Current	400 mA
LED lifespan	L80B10 >72.000h
Energy efficiency class	E

Lighting efficiency	51%
Light beam angle	79°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	51%
Light beam angle	79°

Driver	Included
Power values of the system	43,03 W
Frequency	50/60 Hz
Dimming	DALI / Push
Electrical insulation class	⏏

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	43,03 W
Frequency	50/60 Hz
Dimming	DALI / Push
Electrical insulation class	⏏

Sealing	IP20
Wireless control	Please Consult
Weight	1777 g
Packaged weight	1892 g
Packaging dimensions	408 x 190 x 48 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate


OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Weight	1777 g
Packaged weight	1892 g
Packaging dimensions	408 x 190 x 48 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminary that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

Polar diagram

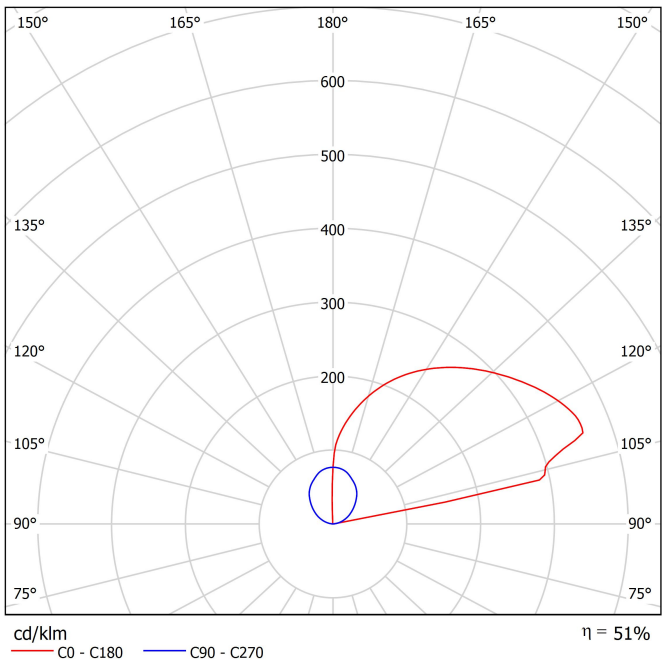

Conical diagram

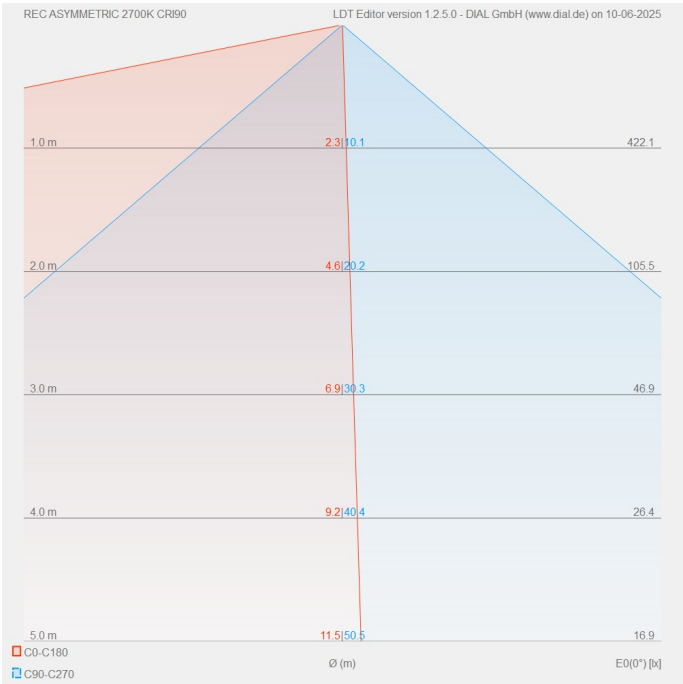



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:


Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

