




Dimensions



Accessories



TRIMLESS ACCESSORY
(MANDATORY)

Name	BLACK FOSTER TRI 2 FLOOD DIM PUSH 3500K W
Reference	A5582023W
Color	White
RAL	Colour in the mass looks alike RAL 9010
Category	CEILING RECESSED

Type	LED
Gross luminous flux	460 lm
Colour temperature	3500 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	4,2 W
Current	700 mA
Efficacy	110 lm/W
LED lifespan	L90B10 >102.000h

Lighting efficiency	86%
Light beam angle	38°

Driver	Included
Power values of the system	6,16 W
Frequency	50/60 Hz
Dimming	Push
Electrical insulation class	<input type="checkbox"/>

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	49 x 93 mm
Weight	220 g
Packaged weight	300 g
Packaging dimensions	275 x 85 x 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA



Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.


Polar diagram

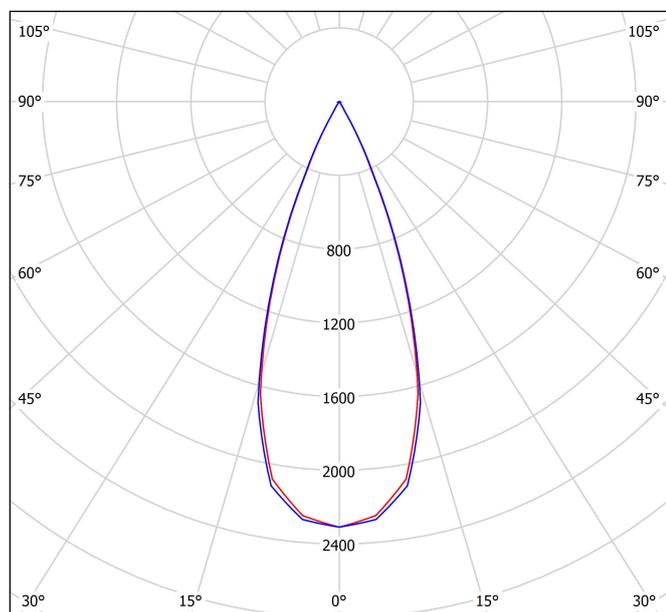

cd/klm
 — C0 - C180 — C90 - C270

η = 86%

Conical diagram

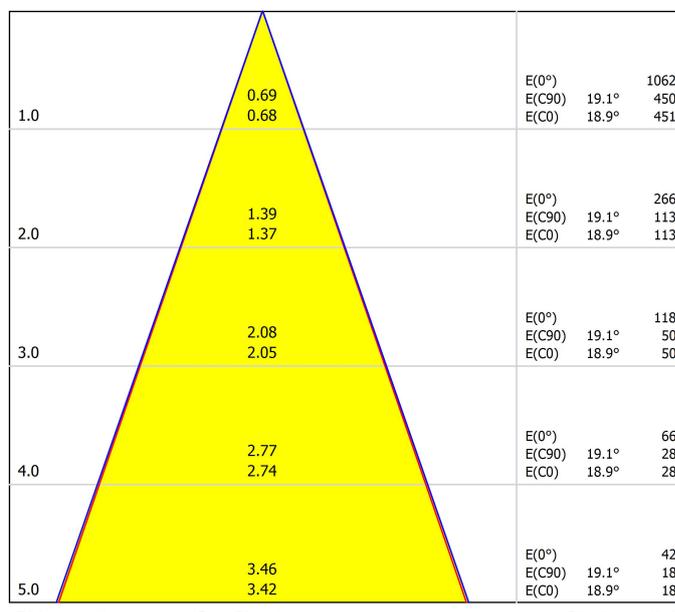

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 37.8°)
 — C90 - C270 (Half-value Angle: 38.2°)

UGR


Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	70	70
ρ Walls	50	30	50	30	30	50	30	50	30	30	50	30
ρ Floor	20	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	-10.3	-9.7	-10.0	-9.5	-9.3	-9.9	-9.3	-9.7	-9.1	-8.9	-8.9
	3H	-5.3	-4.7	-5.0	-4.5	-4.2	-5.0	-4.4	-4.8	-4.2	-4.0	-4.0
	4H	-2.4	-1.9	-2.1	-1.6	-1.4	-2.0	-1.4	-1.7	-1.2	-0.9	-0.9
	6H	1.1	1.6	1.4	1.9	2.2	1.3	1.8	1.6	2.1	2.4	2.4
	8H	3.0	3.4	3.3	3.7	4.0	3.1	3.6	3.4	3.9	4.2	4.2
4H	12H	4.9	5.4	5.3	5.7	6.0	5.1	5.5	5.4	5.8	6.1	6.1
	2H	-8.7	-8.1	-8.4	-7.9	-7.6	-8.5	-7.9	-8.2	-7.7	-7.4	-7.4
	3H	-3.5	-3.0	-3.1	-2.7	-2.4	-3.3	-2.9	-3.0	-2.6	-2.2	-2.2
	4H	-0.5	-0.1	-0.1	0.2	0.6	-0.2	0.2	0.2	0.6	0.9	0.9
	6H	3.0	3.4	3.4	3.7	4.1	3.2	3.5	3.6	3.9	4.3	4.3
8H	8H	4.9	5.2	5.3	5.6	6.0	5.0	5.3	5.4	5.7	6.1	6.1
	12H	7.0	7.2	7.4	7.6	8.1	7.1	7.3	7.5	7.7	8.1	8.1
	4H	0.8	1.1	1.3	1.5	1.9	1.1	1.4	1.5	1.7	2.1	2.1
	6H	4.5	4.7	4.9	5.1	5.6	4.6	4.8	5.1	5.2	5.7	5.7
	8H	6.5	6.7	7.0	7.1	7.6	6.6	6.8	7.0	7.2	7.7	7.7
12H	12H	8.7	8.9	9.2	9.3	9.8	8.8	8.9	9.3	9.4	9.9	9.9
	4H	1.3	1.6	1.8	2.0	2.4	1.5	1.8	1.9	2.2	2.6	2.6
	6H	5.0	5.2	5.5	5.6	6.1	5.1	5.3	5.6	5.7	6.2	6.2
8H	7.1	7.3	7.6	7.7	8.2	7.2	7.3	7.7	7.8	8.3	8.3	
Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.5 / -0.3					+0.6 / -0.3						
S = 1.5H	+1.1 / -0.5					+1.3 / -0.5						
S = 2.0H	+1.9 / -0.8					+2.3 / -0.8						
Standard table	---					---						
Correction Summand	---					---						
Corrected Glare Indices referring to 460lm Total Luminous Flux												

Installation guide



<https://youtu.be/tgGsQdaYe-w>

MANDATORY FOR INSTALLATION

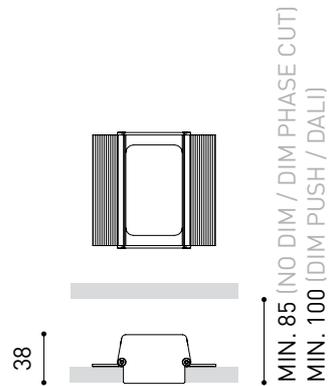



	PRODUCT
Model	BLACK FOSTER Trimless 2 Accessory
Reference	A560-00-02- W N
Recess measurements	 49 X 93

MANDATORY FOR INSTALLATION

Easy installation

Accessible driver after installation

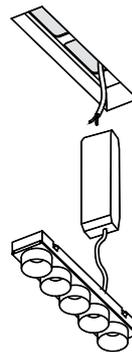



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

