




Dimensions



Accessories

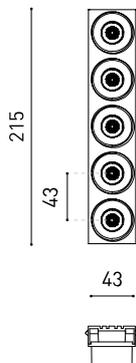

TRIMLESS ACCESSORY
(MANDATORY)

Name	BLACK FOSTER TRI 5 FLOOD DIM PH.CUT 3000K W
Reference	A5584051W
Color	White
RAL	Colour in the mass looks alike RAL 9010
Category	CEILING RECESSED

Type	LED
Gross luminous flux	1050 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	10,5 W
Current	700 mA
Efficacy	100 lm/W
LED lifespan	L90B10 >102.000h

Lighting efficiency	86%
Light beam angle	38°


Driver	Included
Power values of the system	13,22 W
Frequency	50/60 Hz
Dimming	Phase Cut
Electrical insulation class	□

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	49 x 222 mm
Weight	260 g
Packaged weight	340 g
Packaging dimensions	275 x 85 x 70 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene



Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.


Polar diagram

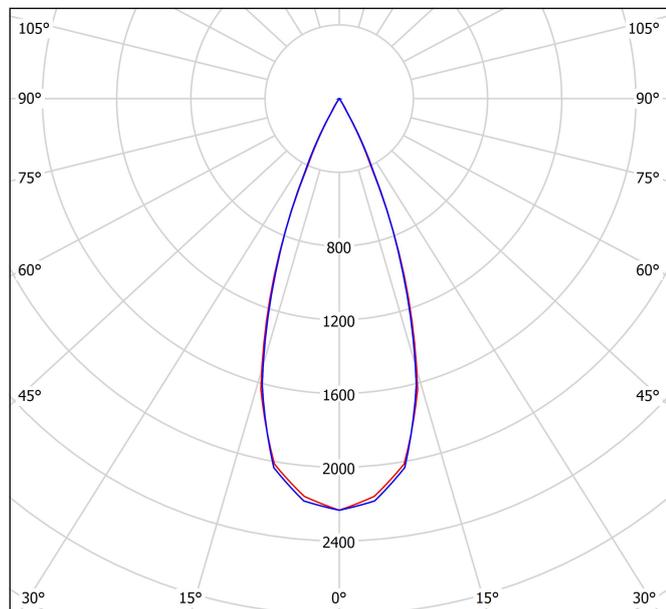

cd/klm
 — C0 - C180 — C90 - C270

η = 86%

Conical diagram

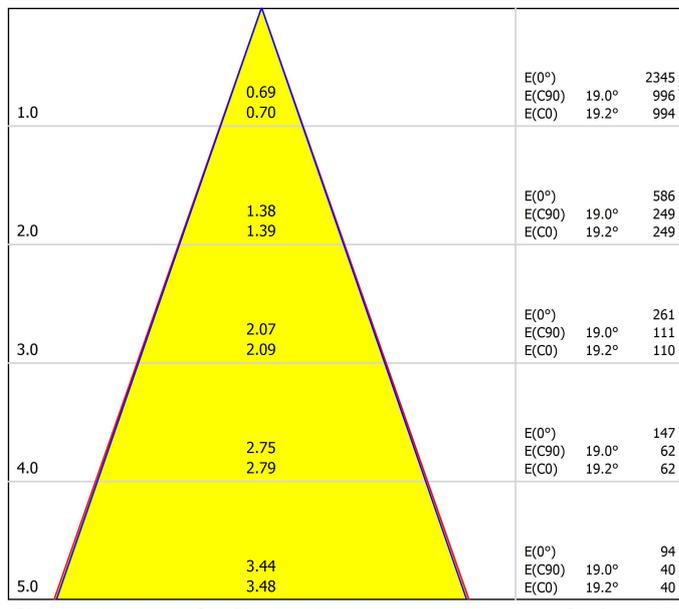

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 38.4°)
 — C90 - C270 (Half-value Angle: 38.0°)

UGR


Glare Evaluation According to UGR													
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	70	70	
ρ Walls	50	30	50	30	30	50	30	50	30	30	50	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	20	20	
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis							
2H	2H	-13.6	-13.0	-13.4	-12.8	-12.6	-14.5	-13.9	-14.3	-13.7	-13.5		
	3H	-7.3	-6.7	-7.0	-6.5	-6.3	-7.2	-6.6	-6.9	-6.4	-6.2		
	4H	-3.8	-3.3	-3.5	-3.0	-2.8	-3.3	-2.7	-3.0	-2.5	-2.2		
	6H	-0.2	0.3	0.1	0.6	0.9	0.2	0.7	0.5	1.0	1.3		
	8H	1.7	2.2	2.0	2.4	2.7	2.0	2.5	2.3	2.8	3.1		
4H	12H	3.7	4.1	4.0	4.4	4.7	4.0	4.5	4.4	4.8	5.1		
	2H	-11.1	-10.5	-10.8	-10.3	-10.0	-11.4	-10.9	-11.1	-10.6	-10.4		
	3H	-5.1	-4.6	-4.7	-4.3	-4.0	-4.9	-4.5	-4.6	-4.2	-3.8		
	4H	-1.7	-1.3	-1.3	-0.9	-0.6	-1.2	-0.8	-0.9	-0.5	-0.2		
	6H	1.9	2.2	2.3	2.6	3.0	2.2	2.5	2.6	2.9	3.3		
8H	8H	3.8	4.0	4.2	4.4	4.8	4.0	4.3	4.4	4.7	5.1		
	12H	5.8	6.0	6.2	6.4	6.9	6.1	6.4	6.5	6.8	7.2		
	4H	-0.1	0.2	0.3	0.5	0.9	0.1	0.4	0.6	0.8	1.2		
	6H	3.5	3.7	4.0	4.1	4.6	3.7	3.9	4.2	4.3	4.8		
	8H	5.5	5.7	5.9	6.1	6.6	5.7	5.9	6.1	6.3	6.8		
12H	12H	7.6	7.8	8.1	8.3	8.7	7.9	8.0	8.4	8.5	9.0		
	4H	0.4	0.6	0.8	1.0	1.5	0.6	0.9	1.0	1.3	1.7		
	6H	4.1	4.3	4.6	4.7	5.2	4.3	4.4	4.7	4.9	5.4		
	8H	6.2	6.3	6.7	6.8	7.3	6.3	6.5	6.8	6.9	7.4		
	Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.9 / -0.3					+1.3 / -0.4							
S = 1.5H	+1.9 / -0.6					+2.7 / -0.7							
S = 2.0H	+3.1 / -0.8					+4.2 / -1.0							
Standard table Correction Summand	---					---							
Corrected Glare Indices referring to 1050lm Total Luminous Flux													

Installation guide



<https://youtu.be/tgGsQdaYe-w>

MANDATORY FOR INSTALLATION

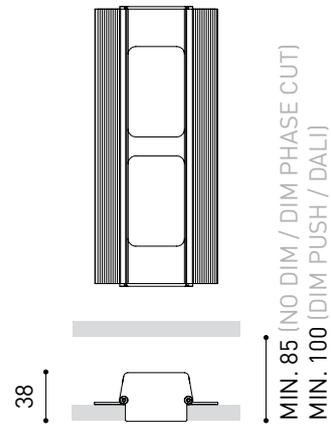



Model	PRODUCT
Reference	BLACK FOSTER Trimless 5 Accessory
Recess measurements	A560-00-05- W N
	 49 X 222

MANDATORY FOR INSTALLATION

Easy installation

Accessible driver after installation

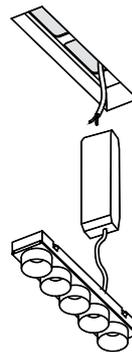



DRIVER


0000-74-75	DRIVER LED 15W 700mA DIM PH.CUT
------------	---------------------------------

PHASE CUT DIMMERS TESTED FOR COMPATIBILITY:

Brand / Manufacturer	Model number	Dimming Type
Berker	2874	Trailing edge
Busch-Jaeger	6513 U-102	Trailing edge
Busch-Jaeger	6523 U-102	Trailing edge
Busch-Jaeger	6523 UR-103	Trailing edge
Clipsal	32E450UDM	Trailing edge
Egant	U327	Trailing edge
Etman	ETM321P	Trailing edge
Etman	ETM322P	Trailing edge
HZC Electric	AU-P3	Trailing edge
Jung	225 TDE	Trailing edge
Jung	LB-Management	Trailing edge
Legrand HPM	CAT400T	Trailing edge
Merten	SBD200LED (MEG5134-0000)	Trailing edge
Niko	310-0190 X	Trailing edge
Schneider	CCTSE12011	Trailing edge
Schneider	SBD315RC	Leading edge
Casambi	CBU-TED	Trailing edge

THE PARTICULAR CONDITIONS OF EACH INSTALLATION AND THE SPECIFICATIONS AND CONDITIONS OF USE OF EACH REGULATOR, MAY DIFFER FROM THOSE CONSIDERED IN THE COMPATIBILITY TESTING, AND AFFECT ITS PERFORMANCE IN SAID INSTALLATION.

FOR MORE INFO, PLEASE CONSULT



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

