



Dimensions



Accessories



DRIVER OPTIONS

Name	WALKER 3000K N
Reference	A5780001N
Colour	Black
RAL	Colour in the mass looks alike RAL 9005
Category	WALL

PRODUCT

Type	LED
Gross luminous flux	75 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>95
Power	0,5 W
Efficacy	150 lm/W
LED lifespan	L90B10 >50.000h
Energy efficiency class	E

LIGHT SOURCE

Lighting efficiency	20%
Light beam angle	62°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	II

LIGHTING FIXTURE | ELECTRICAL DATA

Sealing	IP20
Wireless control	Please Consult
Recess measurements	18 x 167 mm
Weight	60 g
Packaged weight	110 g
Packaging dimensions	231 x 69 x 64 mm
Units per package	1
Materials	Aluminium / Polycarbonate


OTHER DATA




Walker is a recessed wall luminaire, ideal for guiding circulation through corridors, staircases and transition areas. A discreet design within technical lighting that blends seamlessly into the architecture itself, allowing light to emerge from the wall, especially in its trimless version. Its directional beam and controlled light distribution enhance visual rhythm when used in repetition. Available in different colour temperatures (from 2700K to 4000K), it was conceived to integrate naturally into residential and hospitality projects.



Polar diagram

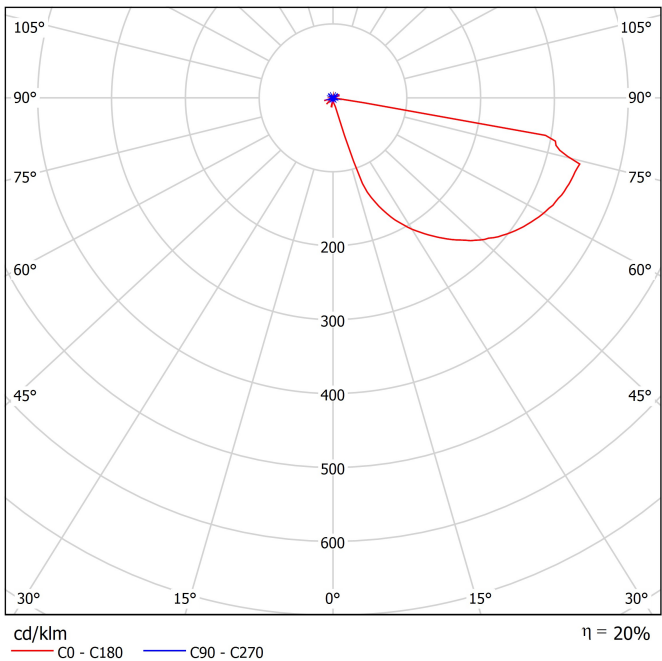

Conical diagram

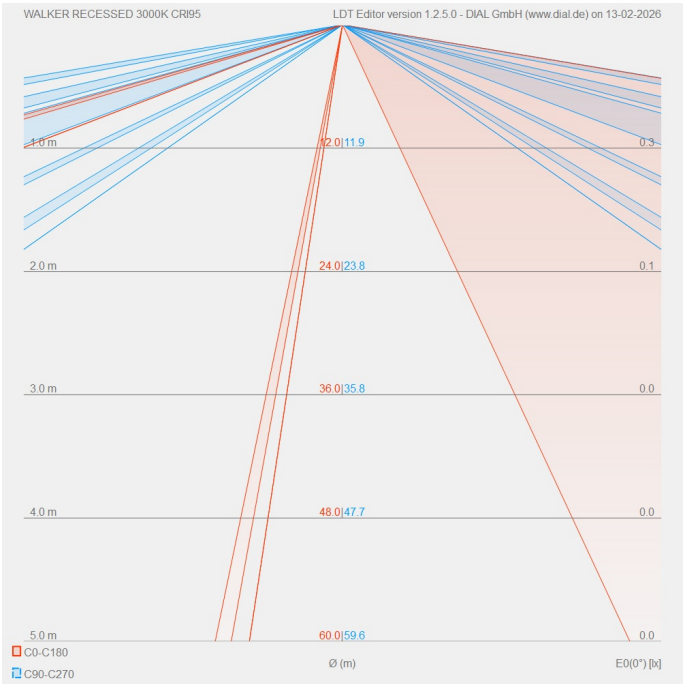



WALKER Recessed								
DRIVER OPTIONS		n Luminaires	P	I	CCT	Flux		
 NO DIM	0434-02-43	1	0,5W	200mA	2700K	70 lm		
	0434-00-37 *	1 to 12			3000K	75 lm		
 NO DIM	0434-02-44 *	1 to 12			3500K	80 lm		
					4000K	85 lm		
 DALI								
220 240 V~					* Driver must be placed on remote			



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

