
Twist

ARKOSLIGHT



Dimensions



Accessories



OPTIONAL MOUNTING ACCESSORY

	PRODUCT
Name	TWIST UL FLOOD 3000K NT
Reference	U2041221NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

	MOUNTING ACCESSORY / DRIVER
Mounting Accessory / Driver	Mandatory, not included. See Mounting acc. Page
Model	REMOTE BOX 6-10,5W 250mA
Reference	U1000120

	LIGHT SOURCE
Type	LED
Gross luminous flux	1057 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	8.4 W
Current	250 mA
Efficacy	126 Lm/W
LED lifespan	L90B10>55.000h

	LIGHTING FIXTURE | PHOTOMETRIC DATA
Lighting efficiency	86%
Delivered luminous flux	909 Lm
Light beam angle	40°

	LIGHTING FIXTURE | ELECTRICAL DATA
Power values of the system	9.8 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

	OTHER DATA
IC Rated	Yes
Environmental location	DAMP

Twist is a LED luminaire, with steerable beams, with considerable yield and small format. Twist is ideal for applications that require maximum steerability and outstanding luminous flux.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Twist

ARKOSLIGHT



	OTHER DATA
Recess measurements	4.7 x 4.7 in | 119 x 119 mm
Weight	0.96 lb | 435 gr
Packaged weight	1.33 lb | 604 gr
Packaging dimensions	6.57x6.06x6.06 in | 167x154x154 mm
Materials	Aluminium

Dimensions



Accessories



OPTIONAL MOUNTING ACCESSORY

Twist is a LED luminaire, with steerable beams, with considerable yield and small format. Twist is ideal for applications that require maximum steerability and outstanding luminous flux.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Mounting Accessory / Driver

ARKOSLIGHT

Mandatory / Not Included

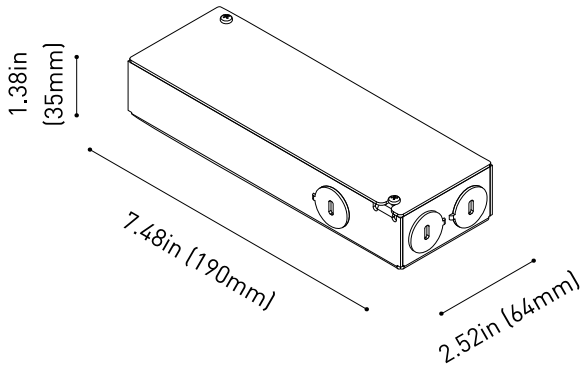

	PRODUCT
Model	REMOTE BOX 6-10,5W 250mA
Driver	Included: EVERLINE - Value series or similar
Reference	U1000120
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 2.52 x 1.38 in | 190 x 64 x 35 mm
Weight	1.38 lb | 625 gr
Packaged weight	1.5 lb | 680 gr
Packaging dimensions	11.26 x 2.91 x 1.77 in | 286 x 74 x 45 mm
Nº Luminaires	1
LED - Driver Distance	18 AWG - 447 ft (350 mA) / 224 ft (700 mA) 16 AWG - 711 ft (350 mA) / 356 ft (700 mA) 14 AWG - 1132 ft (350 mA) / 566 ft (700 mA)

	INPUT CHARACTERISTICS
Input Voltage	120-277 V
Frequency	50/60 Hz

	OUTPUT CHARACTERISTICS
Output Voltage	24 - 42 V
Output Current	250 mA
Output Power	6 - 10.5 W

Intertek


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

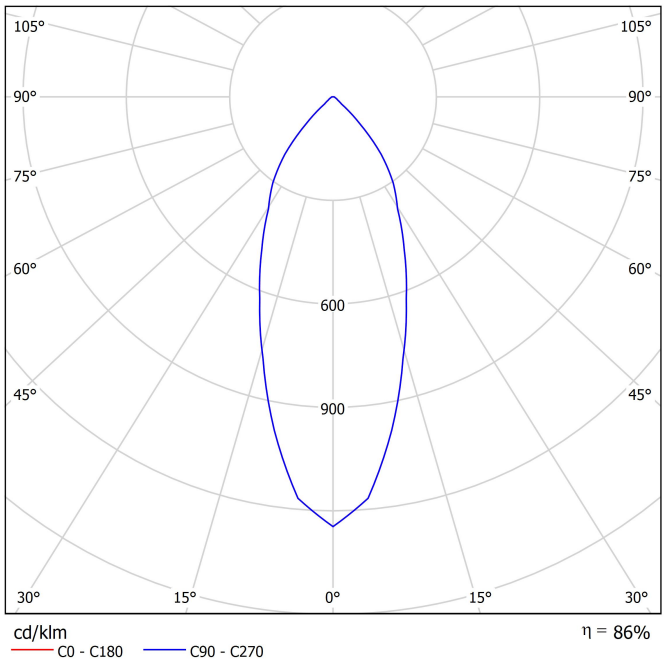

Conical diagram

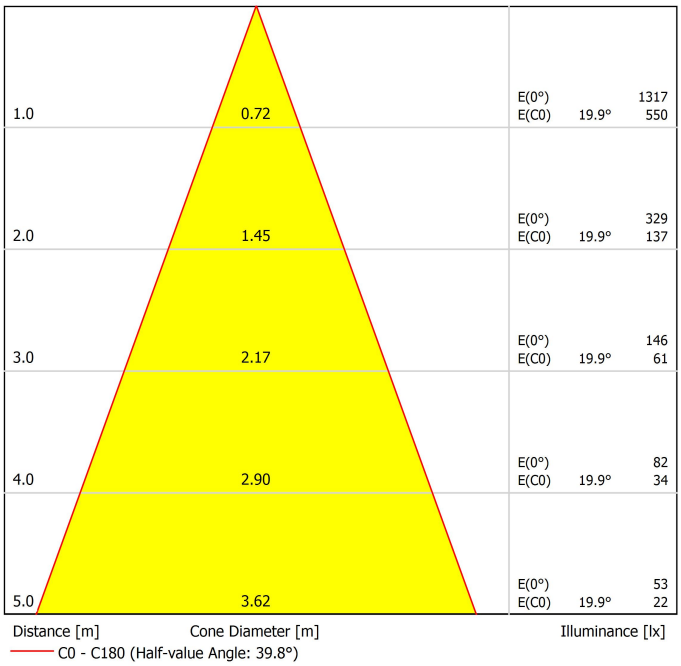


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

New construction Plaster Frame L

ARKOSLIGHT

Optional mounting accessory

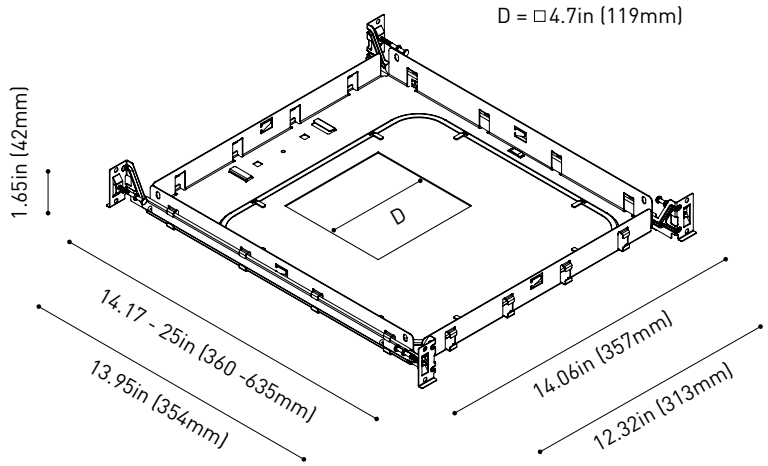

	PRODUCT
Model	NC PLASTER FRAME L 119x119
Reference	U100-01-21
Category	Optional Mounting Accessory
IC Rated	Yes
Weight	2.57 lb | 1166 g
Packaged Weight	4.01 lb | 1821 g
Packaging Dimensions	16.6x15.03x3.15 in | 422x382x80 mm

TO BE USED WITH REMOTE BOX

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE