
Rec

ARKOSLIGHT



Dimensions

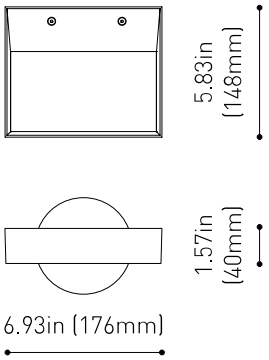

	PRODUCT
Name	REC MINI UL 4000K NT
Reference	U3080012NT
Color	Textured black
RAL	9005
Category	WALL

	LIGHT SOURCE
Type	LED
Gross luminous flux	2700 Lm
Color temperature	4000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	20 W
Current	700 mA
Efficacy	135 Lm/W
LED lifespan	L80B10>60.000h

	LIGHTING FIXTURE | PHOTOMETRIC DATA
Lighting efficiency	75%
Delivered luminous flux	2025 Lm

	LIGHTING FIXTURE | ELECTRICAL DATA
Driver	Included: ERP-PSB series or similar
Power values of the system	23 W
Frequency	50/60 Hz
Dimming	0-10V / TRIAC/ELV dimming only at 120V

	OTHER DATA
Environmental location	DAMP
Junction box cover	Included. For octogonal Junction box
Junction box cover color	Textured white. Other finishing, please consult
Junction box cover measurements	Ø4.33 in | Ø110 mm
Weight	2.37 lb | 1073 gr
Packaged weight	2.53 lb | 1148 gr
Packaging dimensions	9.13 x 7.48 x 1.89 in | 232 x 190 x 48 mm
Materials	Aluminium - Polymethyl Methacrylate

Intertek

REC is an LED luminaire ideal for indirect lighting applications. A perfect fit for projects that give priority to the comfort of indirect light but also require a high volume of lumens. REC is a finest cuboid with pure lines and a minimalist design.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

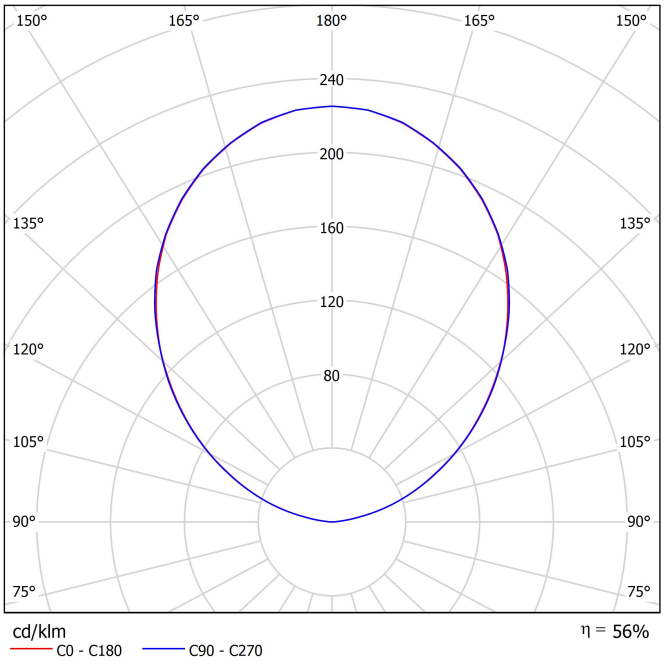

Conical diagram

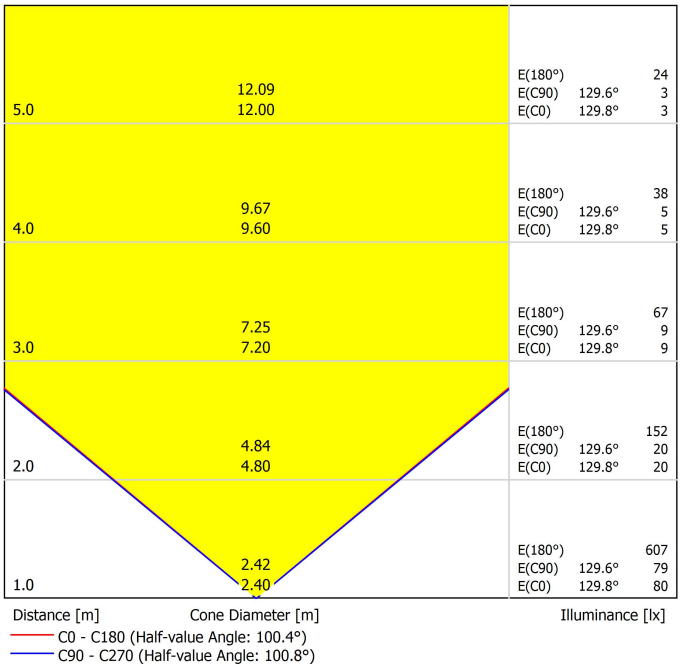

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE