
# Rec

ARKOSLIGHT



## Dimensions

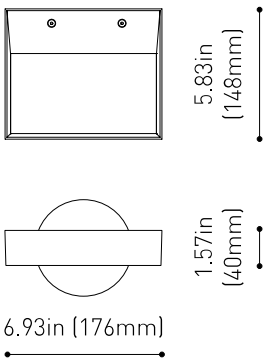


| | |
|---|---|
| **PRODUCT** | |
| **Name** | REC MINI UL 4000K WT |
| **Reference** | U3080012WT |
| **Color** | Textured white |
| **RAL** | 9016 |
| **Category** | WALL |
| **LIGHT SOURCE** | |
| **Type** | LED |
| **Gross luminous flux** | 2700 Lm |
| **Color temperature** | 4000 K |
| **Chromatic stability** | MacAdam Step 2 |
| **Color Rendering Index** | CRI>90 |
| **Power** | 20 W |
| **Current** | 700 mA |
| **Efficacy** | 135 Lm/W |
| **LED lifespan** | L80B10>60.000h |
| **LIGHTING FIXTURE \| PHOTOMETRIC DATA** | |
| **Lighting efficiency** | 75% |
| **Delivered luminous flux** | 2025 Lm |
| **LIGHTING FIXTURE \| ELECTRICAL DATA** | |
| **Driver** | Included: ERP-PSB series or similar |
| **Power values of the system** | 23 W |
| **Frequency** | 50/60 Hz |
| **Dimming** | 0-10V / TRIAC/ELV dimming only at 120V |
| **OTHER DATA** | |
| **Environmental location** | DAMP |
| **Junction box cover** | Included. For octogonal Junction box |
| **Junction box cover color** | Textured white. Other finishing, please consult |
| **Junction box cover measurements** | Ø4.33 in \| Ø110 mm |
| **Weight** | 2.37 lb \| 1073 gr |
| **Packaged weight** | 2.53 lb \| 1148 gr |
| **Packaging dimensions** | 9.13 x 7.48 x 1.89 in \| 232 x 190 x 48 mm |
| **Materials** | Aluminium - Polymethyl Methacrylate |

Intertek

REC is an LED luminaire ideal for indirect lighting applications. A perfect fit for projects that give priority to the comfort of indirect light but also require a high volume of lumens. REC is a finest cuboid with pure lines and a minimalist design.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com




5 Year GUARANTEE


# Lighting Technical Data

ARKOSLIGHT

## Polar diagram

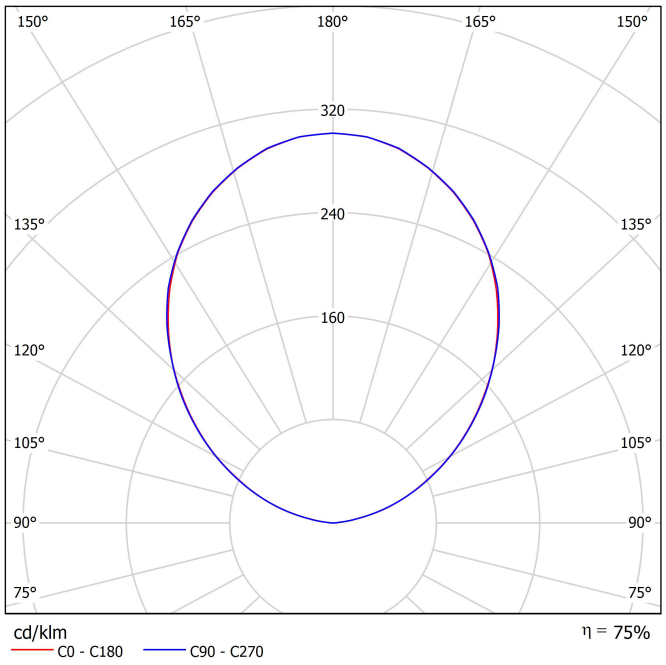


## Conical diagram

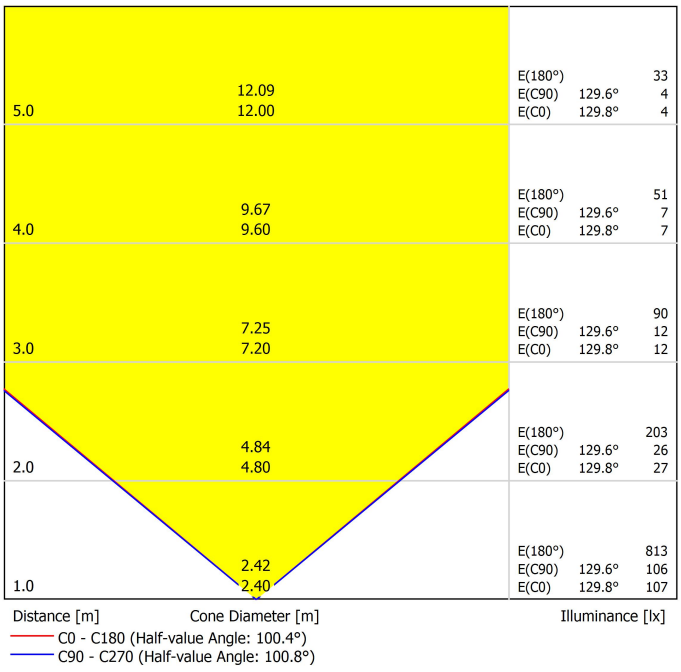


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com



5 Year GUARANTEE