
Alaska

ARKOSLIGHT



Dimensions

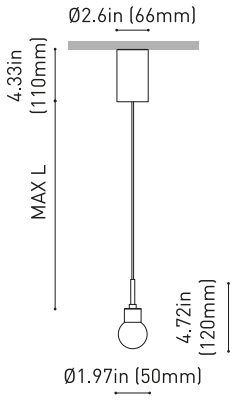

PRODUCT	
Name	ALASKA BASE UL 5M 3000K N
Reference	U4252111N
Color	Black
RAL	9005
Category	SUSPENSION
MOUNTING ACCESSORY / DRIVER	
Mounting Accessory / Driver	Mandatory, not included. See Mounting acc. Page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035
LIGHT SOURCE	
Type	LED
Gross luminous flux	500 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	4.5 W
Current	500 mA
Efficacy	111 Lm/W
LED lifespan	L90B10>55.000h
LIGHTING FIXTURE | PHOTOMETRIC DATA	
Lighting efficiency	30%
Delivered luminous flux	150 Lm
Light beam angle	21°
LIGHTING FIXTURE | ELECTRICAL DATA	
Power values of the system	6.5 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V
OTHER DATA	
IC Rated	Yes
Environmental location	DAMP

Awards

reddot winner 2021
lighting design

Bronze Delta
ADI Awards 2022

NY NEW YORK PRODUCT DESIGN AWARDS 2022

Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Alaska

ARKOSLIGHT



	OTHER DATA
Cord Length	MAX. 16.4 ft | MAX. 5 m
Fast adjustment tensioner	No
Weight	1.16 lb | 524 gr
Packaged weight	1.36 lb | 619 gr
Packaging dimensions	6.97 x 6.42 x 3.15 in | 177 x 163 x 80 mm
Materials	Aluminium / Optical Glass

Dimensions

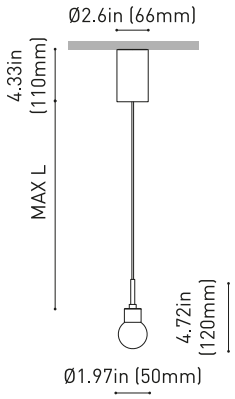

Awards

reddot winner 2021
lighting design

Bronze Delta
ADI Awards 2022

NY NEW YORK PRODUCT DESIGN AWARDS 2022

Alaska is a jewel of suspended light. A magical sphere of solid glass with a magnetic and inexplicable appeal. To include it in the interior design is to give it an icon, warm and seductive. Its optical glass globe of great purity encloses a teardrop of light and is a work of craftsmanship that is polished by hand to create a unique piece as a whole.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Mounting Accessory / Driver

ARKOSLIGHT

Mandatory / Not Included

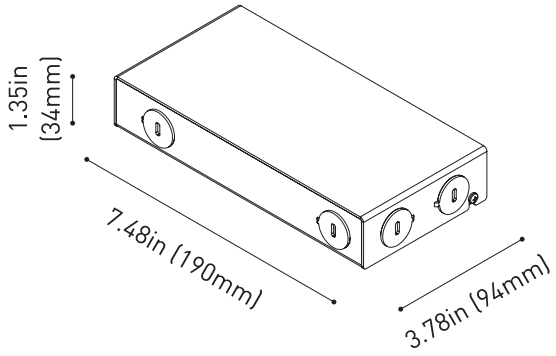

	PRODUCT
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in | 190 x 94 x 34 mm
Weight	1.8 lb | 820 gr
Packaged weight	1.93 lb | 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in | 242 x 105 x 39 mm
Nº Luminaires	1 to 5
LED - Driver Distance	Maximum suggested remote mounting distance is 16 feet

	INPUT CHARACTERISTICS
Input Voltage	120-277 V
Frequency	50/60 Hz


	OUTPUT CHARACTERISTICS
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Wiring Diagram

ARKOSLIGHT

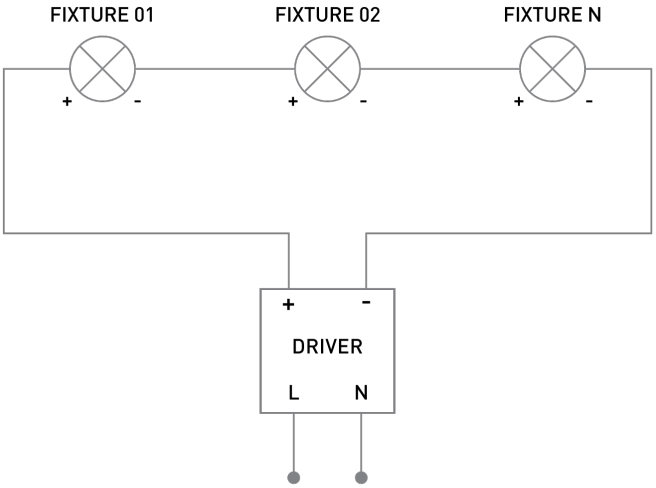

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

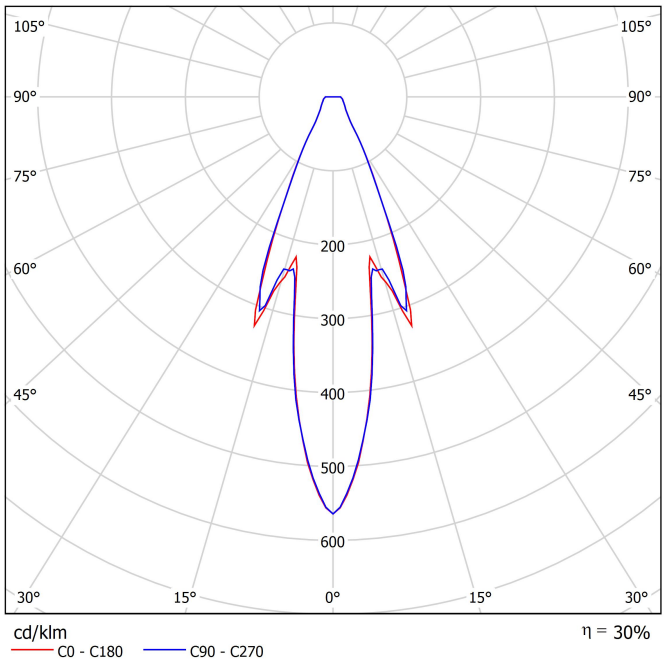

Conical diagram

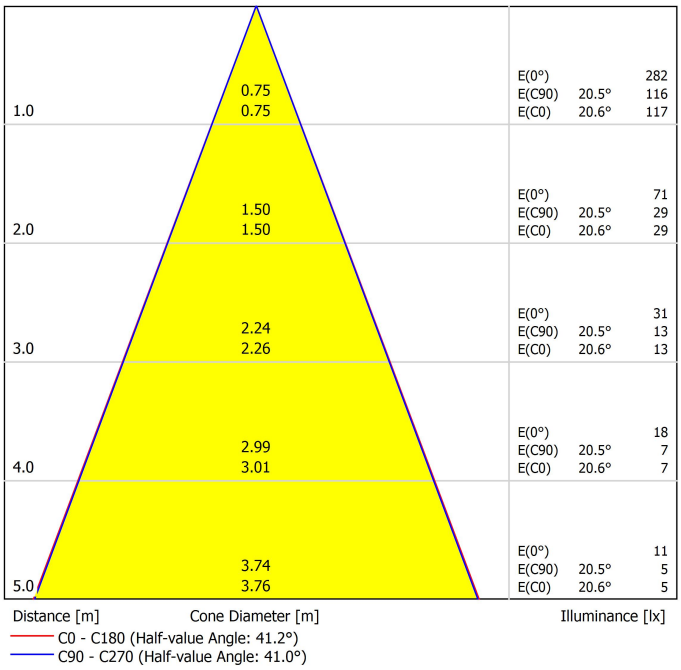

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE