
Loop

ARKOSLIGHT



Dimensions

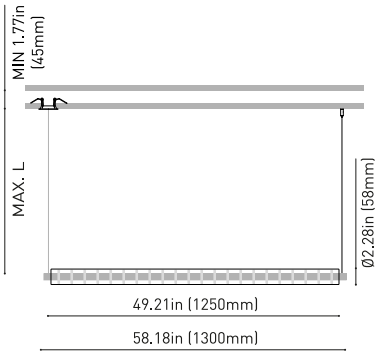

Awards

reddot winner 2023 lighting design

archiproducts AWARDS WINNER

light MIDDLE EAST AWARDS 2025

PRODUCT	
Name	LOOP 1300 UL 3M 3000K BG
Reference	U4731101BG
Color	Brushed Gold
RAL	Paint of metallic nanoparticles
Category	SUSPENSION

MOUNTING ACCESSORY / DRIVER	
Mounting Accessory / Driver	Mandatory, not included. See Mounting acc. Page
Model	REMOTE BOX 19.6–26.4W 700mA
Reference	U1000137

LIGHT SOURCE	
Type	LED
Gross luminous flux	3070 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>95
Power	24.6 W
Current	700 mA
Efficacy	125 Lm/W
LED lifespan	L90B10>50.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA	
Lighting efficiency	38%
Delivered luminous flux	1167 Lm
Light beam angle	110°

LIGHTING FIXTURE | ELECTRICAL DATA	
Power values of the system	28.1 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA	
IC Rated	Yes
Environmental location	DAMP

Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Loop

ARKOSLIGHT



OTHER DATA	
Recess measurements	Ø2.44 in | Ø62 mm
Cord Length	MAX. 9.84 ft | MAX. 3 m
Fast adjustment tensioner	No
Weight	6.59 lb | 2987 gr
Packaged weight	10.99 lb | 4987 gr
Packaging dimensions	Ø5 x 64.76 in | Ø127 x 1645 mm
Materials	Optical glass / Optical Polymethyl Methacrylate

Dimensions

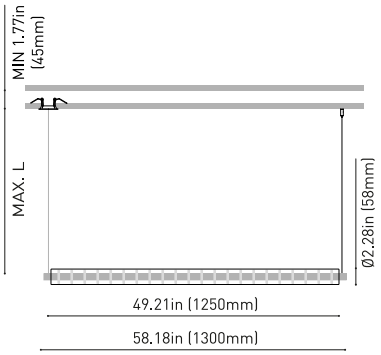

Awards

reddot winner 2023 lighting design

archiproducts AWARDS WINNER

light MIDDLE EAST AWARDS 2025

Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Mounting Accessory / Driver

ARKOSLIGHT

Mandatory / Not Included

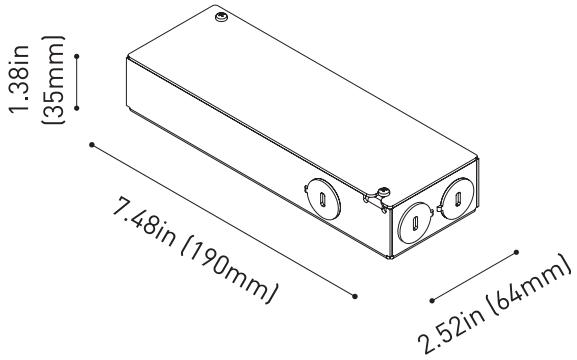

	PRODUCT
Model	REMOTE BOX 19.6–26.4W 700mA
Driver	Included
Reference	U1000137
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 2.52 x 1.38 in | 190 x 64 x 35 mm
Weight	1.59 lb | 720 gr
Packaged weight	1.93 lb | 875 gr
Packaging dimensions	11.26 x 2.91 x 1.77 in | 286 x 74 x 45 mm
Nº Luminaires	1
LED - Driver Distance	Maximum suggested remote mounting distance is 24 feet

	INPUT CHARACTERISTICS
Input Voltage	120-277 V
Frequency	50/60 Hz


	OUTPUT CHARACTERISTICS
Output Voltage	28 - 42 V
Output Current	700 mA
Output Power	19.6 - 26.4 W

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Wiring Diagram

ARKOSLIGHT

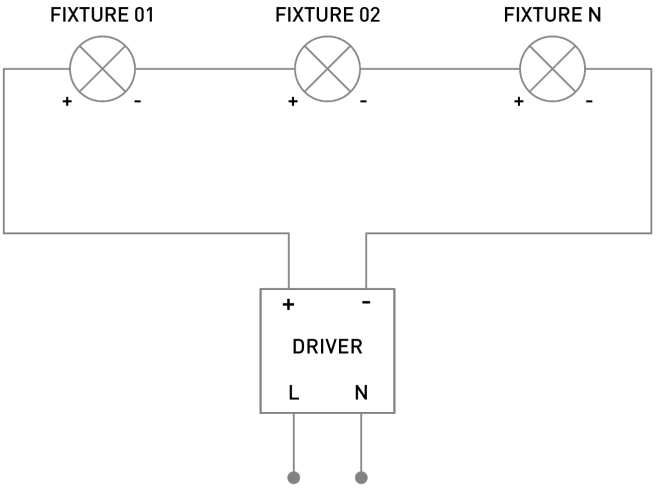

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

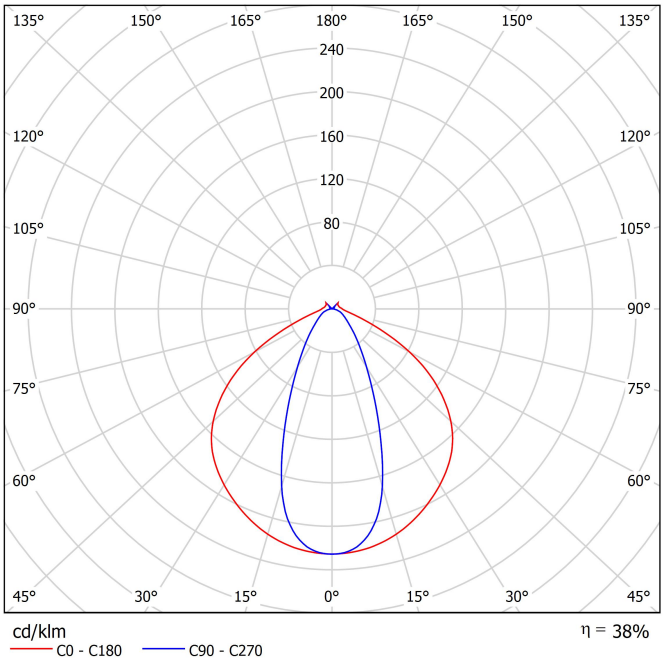

Conical diagram

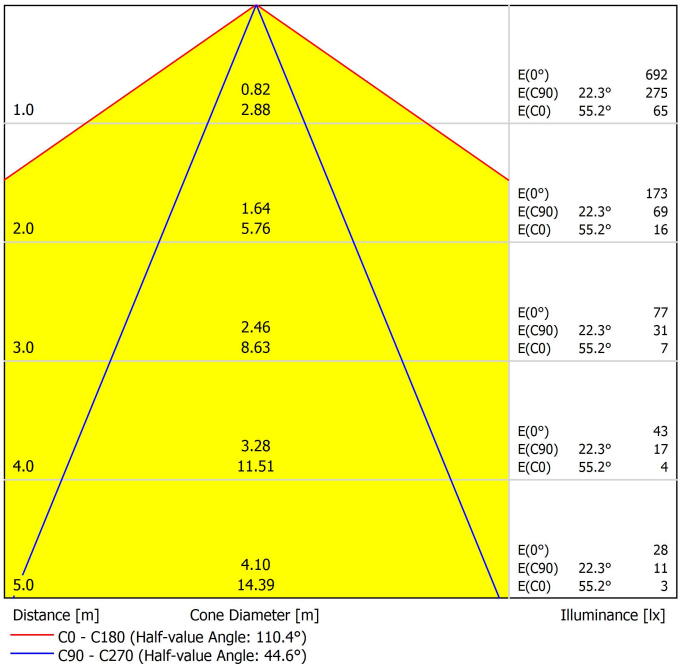

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE