
Loop

ARKOSLIGHT



Dimensions

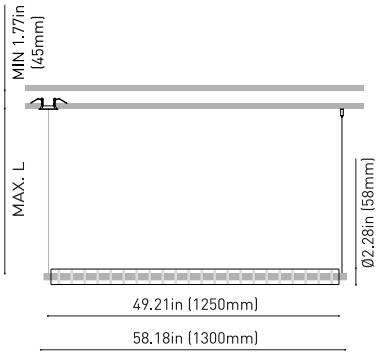

Awards

reddot winner 2023 lighting design

archiproducts AWARDS WINNER

light MIDDLE EAST AWARDS 2025

PRODUCT	
Name	LOOP 1300 UL 5M 3000K N
Reference	U4731201N
Color	Black
RAL	9005
Category	SUSPENSION

MOUNTING ACCESSORY / DRIVER	
Mounting Accessory / Driver	Mandatory, not included. See Mounting acc. Page
Model	REMOTE BOX 19.6–26.4W 700mA
Reference	U1000137

LIGHT SOURCE	
Type	LED
Gross luminous flux	3070 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>95
Power	24.6 W
Current	700 mA
Efficacy	125 Lm/W
LED lifespan	L90B10>50.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA	
Lighting efficiency	38%
Delivered luminous flux	1167 Lm
Light beam angle	110°

LIGHTING FIXTURE | ELECTRICAL DATA	
Power values of the system	28.1 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA	
IC Rated	Yes
Environmental location	DAMP

Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Loop

ARKOSLIGHT



	OTHER DATA
Recess measurements	Ø2.44 in | Ø62 mm
Cord Length	MAX. 16.4 ft | MAX. 5 m
Fast adjustment tensioner	No
Weight	6.59 lb | 2987 gr
Packaged weight	10.99 lb | 4987 gr
Packaging dimensions	Ø5 x 64.76 in | Ø127 x 1645 mm
Materials	Optical glass / Optical Polymethyl Methacrylate

Dimensions

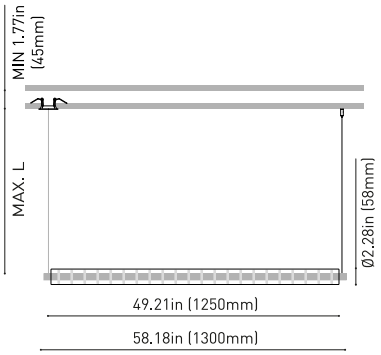

Awards

reddot winner 2023 lighting design

archiproducts AWARDS WINNER

light MIDDLE EAST AWARDS 2025

Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Mounting Accessory / Driver

ARKOSLIGHT

Mandatory / Not Included

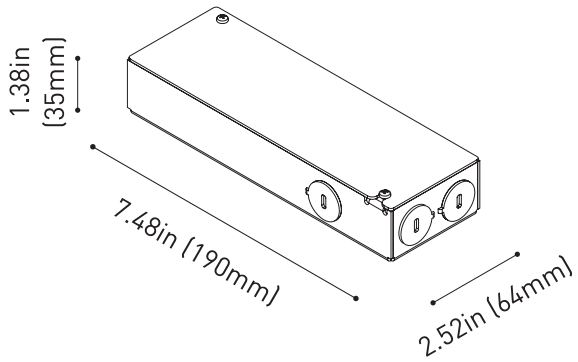

	PRODUCT
Model	REMOTE BOX 19.6–26.4W 700mA
Driver	Included
Reference	U1000137
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 2.52 x 1.38 in | 190 x 64 x 35 mm
Weight	1.59 lb | 720 gr
Packaged weight	1.93 lb | 875 gr
Packaging dimensions	11.26 x 2.91 x 1.77 in | 286 x 74 x 45 mm
Nº Luminaires	1
LED - Driver Distance	Maximum suggested remote mounting distance is 24 feet

	INPUT CHARACTERISTICS
Input Voltage	120-277 V
Frequency	50/60 Hz


	OUTPUT CHARACTERISTICS
Output Voltage	28 - 42 V
Output Current	700 mA
Output Power	19.6 - 26.4 W

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Wiring Diagram

ARKOSLIGHT

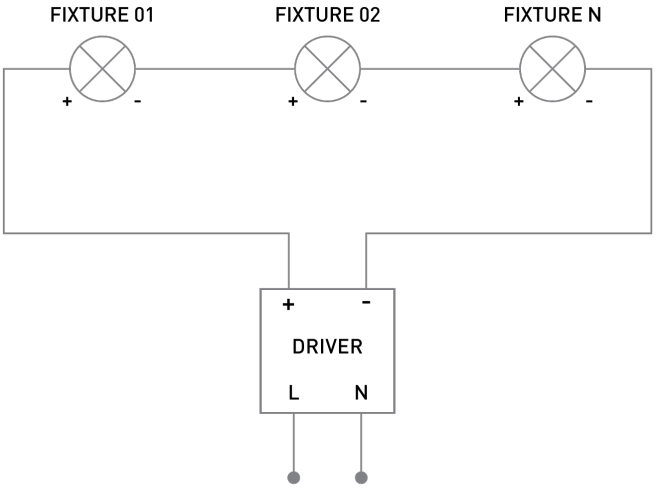

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

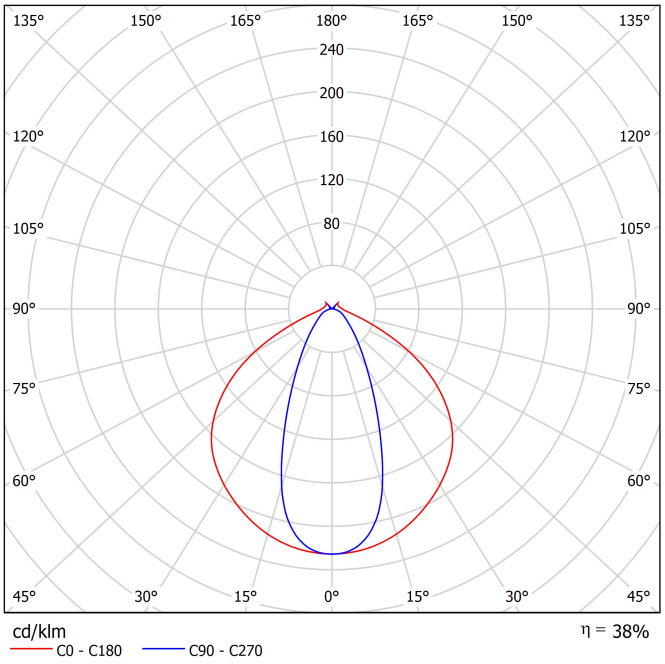

Conical diagram

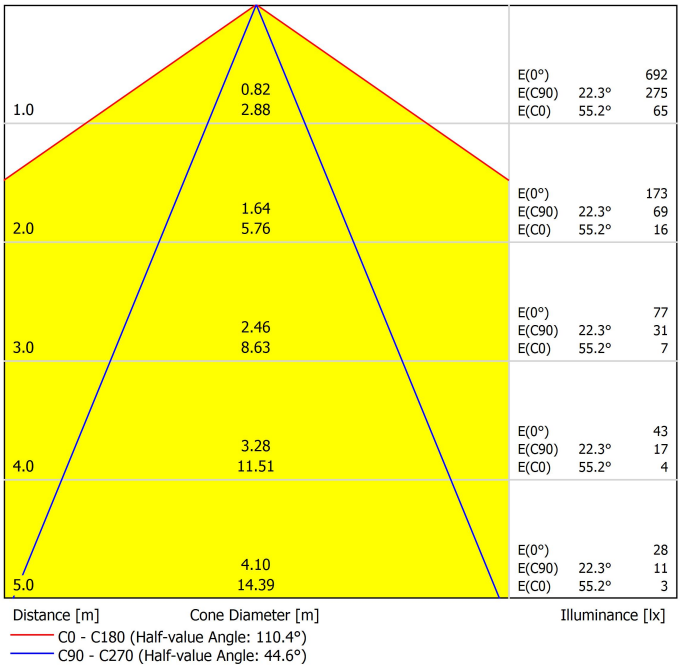

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE