
Flip Recessed

ARKOSLIGHT



Dimensions



PRODUCT	
Name	FLIP RECESSED UL FLOOD 2700K NTMG
Reference	U4910020NTMG
Color	Textured black-Metallized gold
RAL	Metallic finish
Category	CEILING RECESSED

MOUNTING ACCESSORY / DRIVER	
Mounting Accessory / Driver	Mandatory, not included. See Mounting acc. Page
Model	REMOTE BOX 4-23W 500mA
Reference	U1000035

LIGHT SOURCE	
Type	LED
Gross luminous flux	620 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	6 W
Current	500 mA
Efficacy	103 Lm/W
LED lifespan	L80B10>60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA	
Lighting efficiency	78%
Delivered luminous flux	484 Lm
Light beam angle	34°

LIGHTING FIXTURE | ELECTRICAL DATA	
Power values of the system	8.2 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V

OTHER DATA	
IC Rated	Yes
Environmental location	DAMP

Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Flip Recessed

ARKOSLIGHT



	OTHER DATA
Recess measurements	Ø2.44 in | Ø62 mm
Swivel angle	90°
Rotation angle	350°
Weight	0.518 lb | 235 gr
Packaged weight	0.706 lb | 320 gr
Packaging dimensions	8.07 x 4.72 x 3.78 in | 205 x 120 x 96 mm
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

Dimensions



Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Mounting Accessory / Driver

ARKOSLIGHT

Mandatory / Not Included

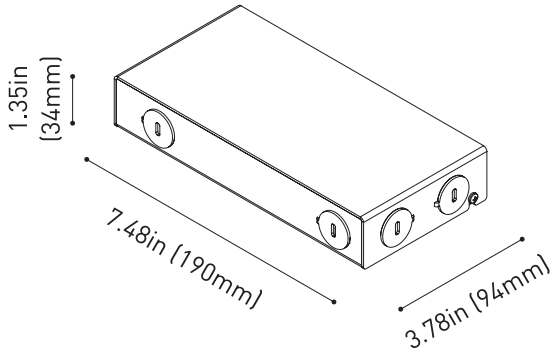

	PRODUCT
Model	REMOTE BOX 4-23W 500mA
Driver	Included
Reference	U1000035
IC Rated	Yes
Dimming	0-10V
Size	7.48 x 3.78 x 1.35 in | 190 x 94 x 34 mm
Weight	1.8 lb | 820 gr
Packaged weight	1.93 lb | 875 gr
Packaging dimensions	9.53 x 4.13 x 1.54 in | 242 x 105 x 39 mm
Nº Luminaires	1 to 4
LED - Driver Distance	Maximum suggested distance is 16 feet

	INPUT CHARACTERISTICS
Input Voltage	120-277 V
Frequency	50/60 Hz

	OUTPUT CHARACTERISTICS
Output Voltage	8 - 46 V
Output Current	500 mA
Output Power	4 - 23 W


Intertek

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Wiring Diagram

ARKOSLIGHT

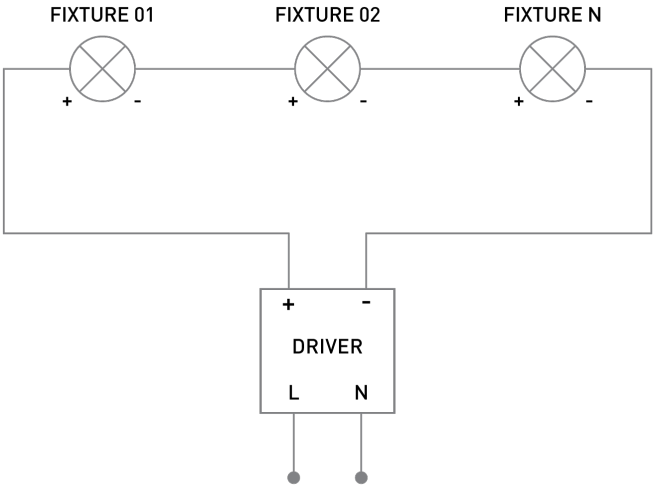

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE