
# Flip Recessed

ARKOSLIGHT



## Dimensions




| PRODUCT | |
|---|---|
| Name | FLIP RECESSED UL FLOOD 3000K WTW |
| Reference | U4910021WTW |
| Color | Textured white - White track |
| RAL | 9016 |
| Category | CEILING RECESSED |

| MOUNTING ACCESSORY / DRIVER | |
|---|---|
| Mounting Accessory / Driver | Mandatory, not included. See Mounting acc. Page |
| Model | REMOTE BOX 4-23W 500mA |
| Reference | U1000035 |

| LIGHT SOURCE | |
|---|---|
| Type | LED |
| Gross luminous flux | 650 Lm |
| Color temperature | 3000 K |
| Chromatic stability | MacAdam Step 2 |
| Color Rendering Index | CRI>90 |
| Power | 6 W |
| Current | 500 mA |
| Efficacy | 108 Lm/W |
| LED lifespan | L80B10>60.000h |

| LIGHTING FIXTURE \| PHOTOMETRIC DATA | |
|---|---|
| Lighting efficiency | 78% |
| Delivered luminous flux | 507 Lm |
| Light beam angle | 34° |

| LIGHTING FIXTURE \| ELECTRICAL DATA | |
|---|---|
| Power values of the system | 8.2 W |
| Voltage | 120-277 V |
| Frequency | 50/60 Hz |
| Dimming | 0-10V |

| OTHER DATA | |
|---|---|
| IC Rated | Yes |
| Environmental location | DAMP |

Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com



5 Year GUARANTEE


# Flip Recessed

ARKOSLIGHT



| | OTHER DATA |
|---|---|
| **Recess measurements** | Ø2.44 in \| Ø62 mm |
| **Swivel angle** | 90° |
| **Rotation angle** | 350° |
| **Weight** | 0.518 lb \| 235 gr |
| **Packaged weight** | 0.706 lb \| 320 gr |
| **Packaging dimensions** | 8.07 x 4.72 x 3.78 in \| 205 x 120 x 96 mm |
| **Materials** | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## Dimensions




Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly on its slim base in search of the precise direction. Its arm is integrated into the vertical geometry of Flip for a compact design.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com




5 Year GUARANTEE

# Mounting Accessory / Driver

ARKOSLIGHT

## Mandatory / Not Included

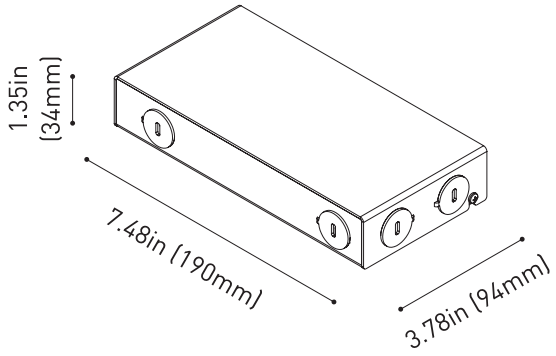


| | PRODUCT |
|---|---|
| Model | REMOTE BOX 4-23W 500mA |
| Driver | Included |
| Reference | U1000035 |
| IC Rated | Yes |
| Dimming | 0-10V |
| Size | 7.48 x 3.78 x 1.35 in \| 190 x 94 x 34 mm |
| Weight | 1.8 lb \| 820 gr |
| Packaged weight | 1.93 lb \| 875 gr |
| Packaging dimensions | 9.53 x 4.13 x 1.54 in \| 242 x 105 x 39 mm |
| Nº Luminaires | 1 to 4 |
| LED - Driver Distance | Maximum suggested distance is 16 feet |

| | INPUT CHARACTERISTICS |
|---|---|
| Input Voltage | 120-277 V |
| Frequency | 50/60 Hz |

| | OUTPUT CHARACTERISTICS |
|---|---|
| Output Voltage | 8 - 46 V |
| Output Current | 500 mA |
| Output Power | 4 - 23 W |

Intertek


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com



5 Year GUARANTEE

# Wiring Diagram

ARKOSLIGHT

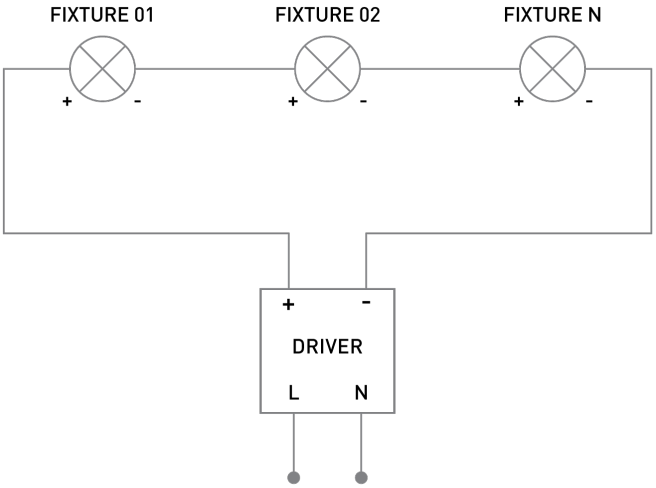


SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com



5Year GUARANTEE