
Coco 48V

ARKOSLIGHT



Dimensions

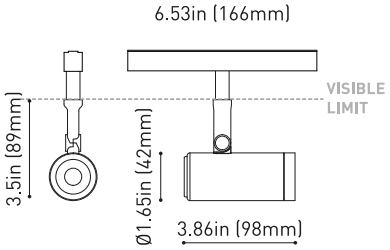

Accessories



HONEYCOMB LOUVER



ANTI-GLARE SCREEN



LINEAR FILTER

TRACK 48V OPTIONS

Awards

reddot winner 2024 lighting design

archiproducts AWARDS WINNER

DESIGN AWARD 2025

PRODUCT	
Name	COCO 48V UL DIM ON BOARD SPOT DIM 2700K NTW
Reference	U4980710NTW
Color	Textured black - White track
RAL	9005
Category	TRACK LIGHTS

LIGHT SOURCE	
Type	LED
Gross luminous flux	1200 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	8.7 W
Efficacy	138 Lm/W
LED lifespan	L80B10>66.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA	
Lighting efficiency	87%
Delivered luminous flux	1044 Lm
Light beam angle	20°

LIGHTING FIXTURE | ELECTRICAL DATA	
Power values of the system	9.2 W
Dimming	DIM ON BOARD

OTHER DATA	
Environmental location	DAMP
Swivel angle	90°
Rotation angle	360°
Track type	Track 48V
Weight	0.595 lb | 270 gr
Packaged weight	0.774 lb | 351 gr
Packaging dimensions	8.27 x 6.46 x 2.24 in | 210 x 164 x 57 mm
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

c ETL us Intertek

A lightweight and powerful solution. Coco is a spotlight with a qualitative and uniform light distribution and provides great freedom of light emissions with four opening angles -flood, medium, spot and superspot - a 360° rotation and a 90° tilt. With an exceptional lm/W ratio, it can be fitted with various accessories: anti-glare honeycomb and anti-glare screen, which reduce glare to facilitate visual comfort, and the linear filter, which sets a linear light distribution. Coco invites one to interact with the light through a version with integrated dimmer, enabling one to adjust the desired intensity in each luminaire. Its tunable white version replicates the effects of natural light by regulating the intensity and colour temperature.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

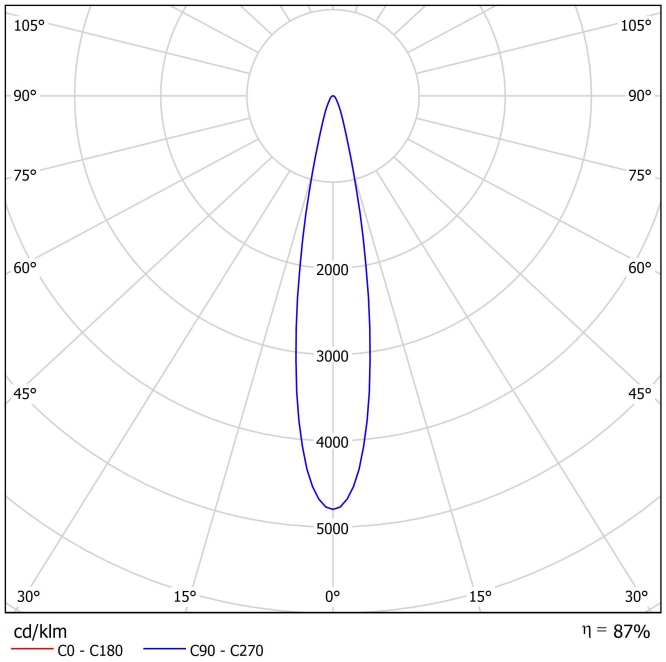

Conical diagram

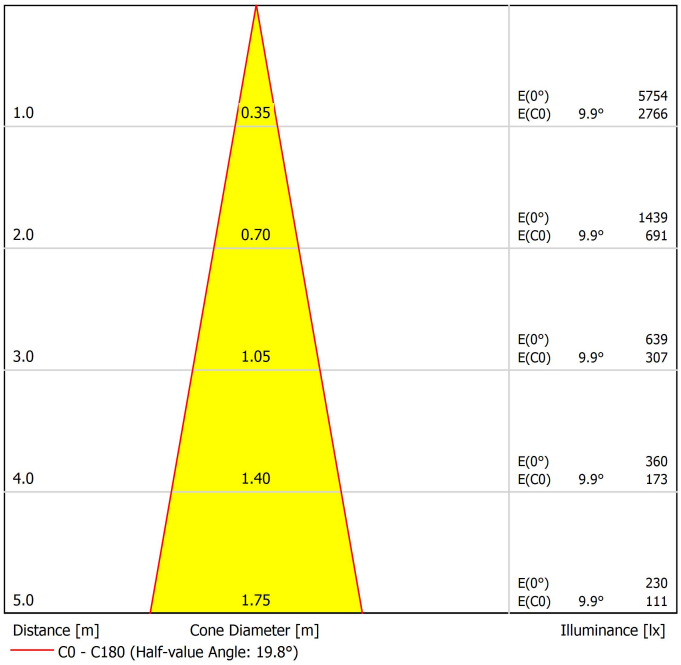


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Anti-glare Honeycomb Louver

ARKOSLIGHT



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	**U498-90-00** | **WT** | **NT** |
Category	Accessories

NOT SOLD SEPARATELY.

Anti-glare Honeycomb Louver


Accessory featuring a honeycomb structure designed to control the light beam, reduce glare, and prevent direct exposure to the light source.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Anti-glare Screen

ARKOSLIGHT



	PRODUCT
Model	Anti-glare Screen
Reference	**U498-90-01** | **WT** | **NT** |
Category	Accessories

NOT SOLD SEPARATELY.

Anti-glare Screen


Accessory designed to reduce direct glare, especially in luminaires with visible optics, and improve visual comfort by blocking uncomfortable emission angles.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE

Linear Filter

ARKOSLIGHT



	PRODUCT
Model	Linear Filter
Reference	**U498-90-02** | **WT** | **NT** |
Category	Accessories

NOT SOLD SEPARATELY | SUITABLE FOR BEAM ≤ 34º

Linear Filter

Transforms the circular light beam into a linear shape. Ideal for applications requiring precise, linear light distribution, allowing you to focus on specific surfaces or avoid the effect of “light pooling” in wide areas.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Track 48V

ARKOSLIGHT

48V track lighting systems are low-voltage lighting solutions based on electrified tracks. The track serves both as a physical structure and as a power carrier, allowing light modules to be placed and repositioned as needed, offering flexibility, safety, and energy efficiency.
Ideal for projects that demand minimalist design, high performance, and adaptability.

To configure your 48V system, you'll need to combine the following components:

1. Tracks – Available in surface, trimless, surface short, suspended (using suspension accessories with the surface track), and indirect light versions. They form the structural and electrical base of the system.


2. Connectors & Power Supply – Ensure electrical continuity between track sections and provide the 48V power input.

3. Accessories – Including end caps, joiners, mounting elements, and optional installation accessories to complete and secure the setup.

Track Options


Surface

TRACK 48V SURFACE 3.28ft (1m) UL	U338-11-00- | NT | WT |
TRACK 48V SURFACE 6.56ft (2m) UL	U338-12-00- | NT | WT |




TRACK 48V SURFACE Corner 90º One Plane UL	U338-14-00- | NT | WT |
TRACK 48V SURFACE T-Joint UL	U338-15-00- | NT |
TRACK 48V SURFACE X-Joint UL	U338-16-00- | NT |


Corner 90º One Plane UL




T-Joint UL



X-Joint UL



Straight joiners included
*Electrical connections not included

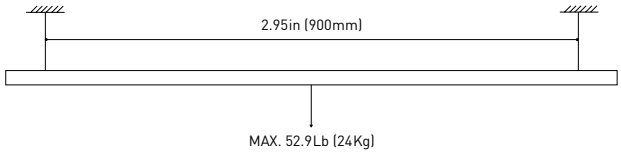


Trimless

TRIMLESS INSTALLATION GUIDE
https://youtu.be/tgGsQdaYe-w


TRACK 48V TRIMLESS 3.28ft (1m) UL	U338-01-00- | N | WT |
TRACK 48V TRIMLESS 6.56ft (2m) UL	U338-02-00- | N | WT |
TRACK 48V TRIMLESS Corner 90º One Plane UL	U338-06-00- | N | WT |
TRACK 48V TRIMLESS Corner 90º Two Planes UL	U338-07-00- | N | WT |

Plasterboard ceiling, mandatory thickness 0.50in (12.5mm). Recommended for installations where the profile can be installed before the false plasterboard ceiling.

Track 48V Trimless UL




Corner 90º One Plane UL



*Electrical connection not included

Corner 90º Two Planes UL




*Electrical connection not included


TRACK 48V TRIMLESS DEEPER 4ft (1.21m) UL	U338-31-00- | N | WT |
TRACK 48V TRIMLESS DEEPER 8ft (2.44m) UL	U338-32-00- | N | WT |
TRACK 48V TRIMLESS DEEPER	
Corner 90º One Plane UL	U338-36-00- | N | WT |
Corner 90º Two Planes UL	U338-37-00- | N | WT |

Plasterboard ceiling, mandatory thickness 0.63in (15.9mm). Recommended for installations where the profile can be installed before the false plasterboard ceiling.

Track 48V Trimless Deeper UL




Track 48V Trim. Deeper Corner 90º One Plane UL



*Electrical connection not included

Track 48V Trim. Deeper Corner 90º Two Planes UL



*Electrical connection not included

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

*Electrical connections are not included. Please choose the required components from the Connectors section.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Track 48V


ARKOSLIGHT

Complementary track accessories

Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.


Surface

Surface Straight Joiner 48V UL
U338-00-11



Trimless

Trimless Straight Joiners (2 units) 48V UL
U338-00-05- | N | WT |



For all tracks


End 48V UL
U338-00-06- | NT | WT |



End Feed 48V UL
U338-00-07- | NT | WT |




Cover Gap 3.28ft (1m) 48V UL
U338-00-30- | N | W |




Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.


Live-End Connector 48V UL
U338-00-01- | N | W |




Central Connector 48V UL
U338-00-02- | N | W |




T-Joint Connector 48V UL
U450-00-07- | N |




Wireless Control 48V UL
U434-01-31- | N | W | Casambi




Corner 90º Connector One Plane 48V UL
U338-00-24- | N | W |
*Not suitable for trimless version



L-Joint Connector 48V UL
U338-00-12- | N | W |



X-Joint Connector 48V UL
U450-00-08- | N |



Power Supply Options

Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.

For all tracks

		P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY	U100-00-78	96W	48V	8.16 x 2.97 x 1.30 in 207 x 75.4 x 33 mm

120 & 277 V | 50/60 Hz

UL DROP VOLTAGE TABLE

		CABLE LENGHT			
		16.40ft 5m	32.80ft 10m	65.62ft 20m	98.43ft 30m
POWER	CABLE SECTION	TRACK LENGHT			
96W	AWG16	164ft 50m	164ft 50m	131.32ft 40m	82ft 25m

COLOUR | N ■ RAL 9005 | W □ RAL 9016 |

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE


Other accessories

Alternative suspension installation

For a suspended configuration, use surface components together with the following accessories:

Suspension Kit (2 units) 48V UL

U338-00-15- | NT | WT |



Suspension feed Kit 48V UL

U338-00-17- | N | W | DIM

*for remote power supply




Trimless installation accessories

Accessories designed to assist in the installation of trimless track systems, making the process easier and ensuring precision.

Trimless Plaster Installation Guard 3.28ft (1m) 48V UL

U338-00-21


Recommended for installation



Fixing Template for Track 48V Trimless UL

U338-00-31


Recommended for installation



Fixing Template for Track 48V Trimless Deeper UL

U338-30-31

Recommended for installation




Trimless mounting accessories

These accessories offer different options for installing trimless track systems according to ceiling type and project needs.

Trimless T-Bracket 48V UL U338-00-03



Trimless Long T-Bracket 48V UL A338-00-04



Trimless Clamp for M6 ROD 48V UL U338-00-09

*See accessories quantities




Trimless Track Clamp 48V UL U338-00-10

*See accessories quantities



Trimless Suspension Kit 48V UL U338-00-08

*See accessories quantities



SUGGESTED MOUNTING ACCESSORIES QUANTITIES

3.28 ft (1000 mm) - 2 Pcs

6.56 ft (2000 mm) - 3 Pcs

TRIMLESS INSTALLATION GUIDE

https://youtu.be/tgGsQdaYe-w

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 | W □ RAL 9016 |

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE