
Nano

ARKOSLIGHT



Dimensions



	PRODUCT
Name	NANO RECESSED UL FLOOD 2700K N
Reference	U5390010N
Color	Black
RAL	Color in the mass looks alike RAL 9005
Category	CEILING RECESSED

	MOUNTING ACCESSORY / DRIVER
Mounting Accessory / Driver	Mandatory, not included. See Mounting acc. Page
Model	REMOTE BOX 1–3.6W 100mA
Reference	U1000130

	LIGHT SOURCE
Type	LED
Gross luminous flux	280 Lm
Color temperature	2700 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	2 W
Current	100 mA
Efficacy	140 Lm/W
LED lifespan	L80B10>55.000h

	LIGHTING FIXTURE | PHOTOMETRIC DATA
Lighting efficiency	84%
Delivered luminous flux	235 Lm
Light beam angle	34°

	LIGHTING FIXTURE | ELECTRICAL DATA
Power values of the system	3.3 W
Voltage	120-277 V
Frequency	50/60 Hz
Dimming	0-10V / TRIAC/ELV

	OTHER DATA
IC Rated	Yes
Environmental location	DAMP

Nano is an exercise in formal synthesis that redraws the boundaries of technical lighting, offering maximum light output with minimum use of raw materials.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


Nano

ARKOSLIGHT



	OTHER DATA
Recess measurements	Ø1.18 in | Ø30 mm
Weight	0.110 lb | 50 gr
Packaged weight	0.179 lb | 81 gr
Packaging dimensions	3.15 x 2.68 x 3.54 in | 80 x 68 x 90 mm
Materials	Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate

Dimensions



Nano is an exercise in formal synthesis that redraws the boundaries of technical lighting, offering maximum light output with minimum use of raw materials.


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Mounting Accessory / Driver

ARKOSLIGHT

Mandatory / Not Included

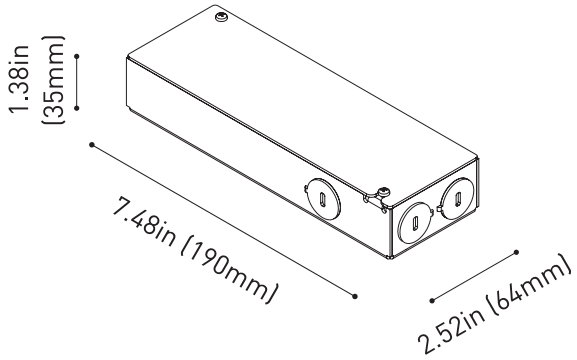

	PRODUCT
Model	REMOTE BOX 1–3.6W 100mA
Driver	Included
Reference	U1000130
IC Rated	Yes
Dimming	0-10V / TRIAC/ELV
Size	7.48 x 2.52 x 1.38 in | 190 x 64 x 35 mm
Weight	1.21 lb | 550 gr
Packaged weight	1.46 lb | 665 gr
Packaging dimensions	11.26 x 2.91 x 1.77 in | 286 x 74 x 45 mm
Nº Luminaires	1
LED - Driver Distance	Maximum suggested distance is 24 feet

	INPUT CHARACTERISTICS
Input Voltage	120-277 V
Frequency	50/60 Hz


	OUTPUT CHARACTERISTICS
Output Voltage	10 - 40 V
Output Current	100 mA
Output Power	1 - 3.6 W

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

Wiring Diagram

ARKOSLIGHT

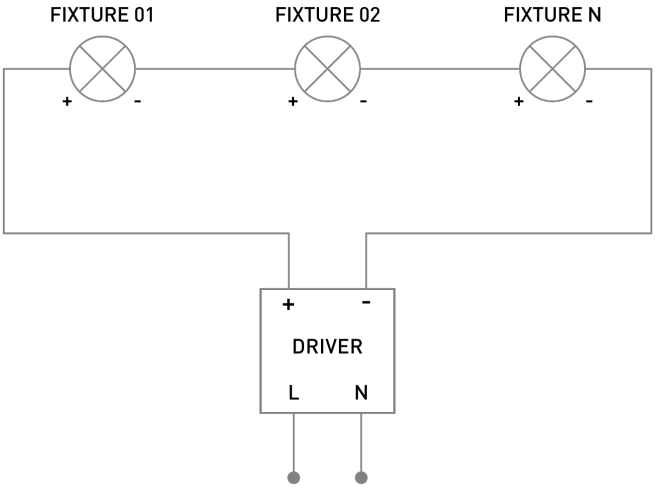

SERIAL CONNECTION FOR SEVERAL FIXTURES TO A SINGLE CONSTANT CURRENT DRIVER
RESPECT THE DISTANCE LED - DRIVER


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5Year GUARANTEE


Lighting Technical Data

ARKOSLIGHT

Polar diagram

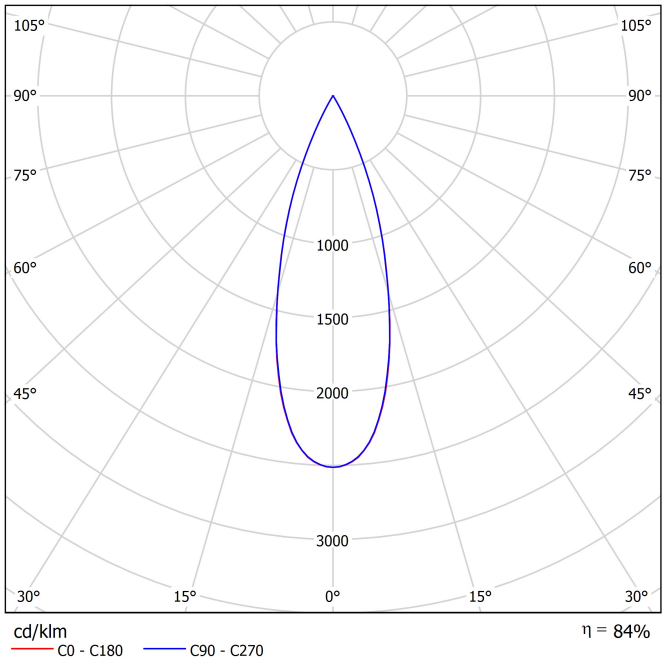

Conical diagram

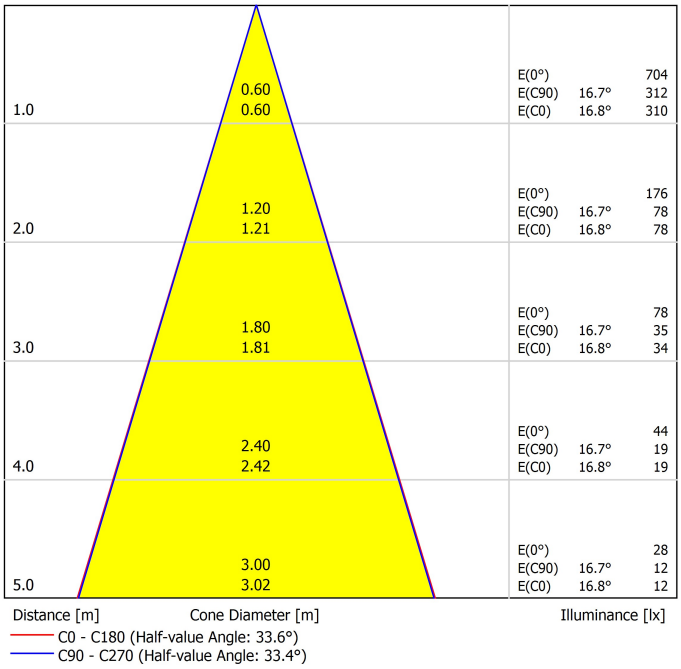

UGR

Glare Evaluation According to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-1.8	-1.2	-1.6	-1.0	-0.8	-1.9	-1.2	-1.6	-1.0	-0.8
	3H	0.3	0.9	0.6	1.1	1.4	0.4	1.0	0.7	1.2	1.4
	4H	1.5	2.1	1.8	2.3	2.6	1.6	2.1	1.9	2.4	2.6
	6H	2.8	3.3	3.1	3.5	3.8	2.8	3.3	3.1	3.6	3.9
	8H	3.3	3.8	3.6	4.1	4.4	3.4	3.9	3.7	4.1	4.4
	12H	4.0	4.5	4.4	4.8	5.1	4.1	4.6	4.4	4.9	5.2
4H	2H	-1.2	-0.6	-0.9	-0.4	-0.1	-1.2	-0.6	-0.9	-0.4	-0.1
	3H	1.2	1.7	1.6	2.0	2.3	1.3	1.8	1.7	2.1	2.4
	4H	2.7	3.1	3.1	3.4	3.8	2.7	3.1	3.1	3.4	3.8
	6H	4.2	4.5	4.6	4.8	5.2	4.1	4.5	4.5	4.8	5.2
	8H	4.8	5.1	5.2	5.5	5.9	4.8	5.1	5.2	5.5	5.9
	12H	5.6	5.9	6.0	6.3	6.7	5.7	5.9	6.1	6.3	6.7
8H	4H	3.2	3.5	3.7	3.9	4.3	3.2	3.5	3.6	3.9	4.3
	6H	4.9	5.1	5.3	5.5	6.0	4.9	5.1	5.3	5.5	6.0
	8H	5.7	5.9	6.2	6.3	6.8	5.8	5.9	6.2	6.4	6.8
	12H	6.7	6.9	7.2	7.3	7.8	6.8	6.9	7.3	7.4	7.9
12H	4H	3.3	3.6	3.8	4.0	4.4	3.3	3.6	3.8	4.0	4.4
	6H	5.1	5.3	5.6	5.7	6.2	5.1	5.3	5.5	5.7	6.2
	8H	6.0	6.1	6.5	6.6	7.1	6.0	6.2	6.5	6.6	7.1

Variation of the observer position for the luminaire distances S

S = 1.0H	+2.7 / -0.9	+2.4 / -0.7
S = 1.5H	+4.8 / -1.2	+4.4 / -1.0
S = 2.0H	+6.6 / -1.6	+6.1 / -1.3
Standard table	BK05	---
Correction Summand	-7.1	---

Corrected Glare Indices referring to 280lm Total Luminous Flux

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE