


DIMENSIONS



ACCESSORIES



DRIVER OPTIONS



CONNECTOR IP67

PRODUCT

Name	DARK M 48V HONEYCOMB 2 3000K OX
Reference	A52302110X
Color	Textured oxidon
Category	OUTDOOR

LIGHT SOURCE

Type	LED
Gross luminous flux	900 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	6,7 W
Efficacy	134 lm/W
LED lifespan	L90B10 >55.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	53%
Light beam angle	34°

LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	7,59 W
Dimming	DALI - Push / WIFI
Electrical insulation class	III


OTHER DATA

Sealing	IP67
Impact resistance	IK08
Recess measurements	Ø92 mm
Outdoor Use	Yes
Maximum surface temperature	68°
Supported load	7000
Weight	0,925 g
Packaged weight	1,03 g
Packaging dimensions	155 x 137 x 124 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent





Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). *** NOTE: Recessed box included

POLAR DIAGRAM

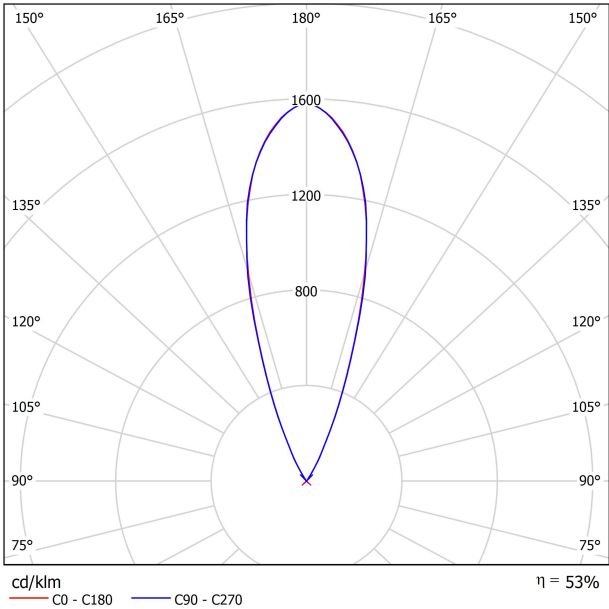


CONICAL DIAGRAM

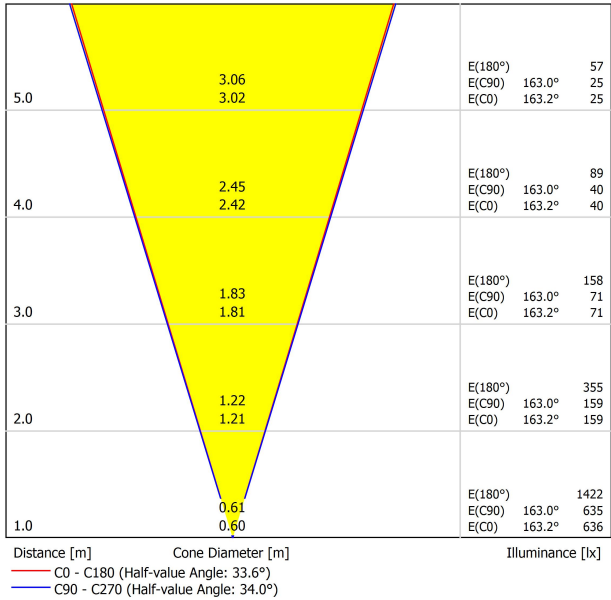




			P	D (A x B x C)
48V Power Supply	ON/OFF	0434-01-62	150W	350 x 30 x 18mm
220 V~				TO BE INSTALLED ON REMOTE
240				



			P	D (A x B x C)
Remote Constant Voltage Dimmer		0433-01-32	DALI/PUSH	181 x 42 x 20mm
		0434-01-64	WIFI	105 x 44 x 23mm
24V				TO BE INSTALLED ON REMOTE




DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGHT (m)		
		<25	<50	<75
150	0,75	✓	✗	✗
	1,0	✓	✓	✗
	1,5	✓	✓	✓


IP67 CONNECTOR

OPTIONAL ACCESSORY




PRODUCT	
Model	Connector IP67
Reference	0434-01- 66 N
Category	Accessories

For cable Ø4,5 - 6,5mm | section ≤ 1,5mm²



PRODUCT	
Model	Connector IP67 T-Shape
Reference	0434-01- 75 N
Category	Accessories

For cable Ø3,5 - 5,5mm | section ≤ 1,5mm²



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN




Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen




Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen




Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

