




### DIMENSIONS



### ACCESSORIES

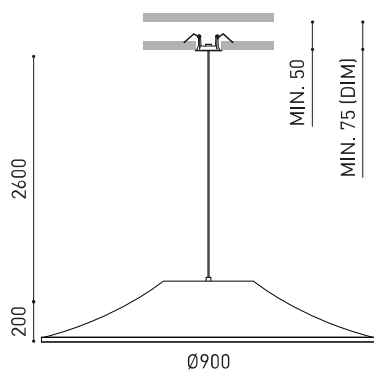

WIRE TRIMLESS ACCESSORY



TRIMLESS TOOL

### PRODUCT

|                |                              |
|----------------|------------------------------|
| Name           | WARP 900 DIM PH.CUT 2700K NT |
| Reference      | A5340050NT                   |
| Color          | Textured black               |
| Base Finishing | Textured black               |
| RAL            | 9005                         |
| Category       | SUSPENSION                   |

### LIGHT SOURCE

|                        |                 |
|------------------------|-----------------|
| Type                   | LED             |
| Gross luminous flux    | 1150 lm         |
| Colour temperature     | 2700 K          |
| Chromatic stability    | MacAdam Step 2  |
| Colour Rendering Index | CRI>90          |
| Power                  | 7,2 W           |
| Current                | 200 mA          |
| Efficacy               | 160 lm/W        |
| LED lifespan           | L90B10 >60.000h |

### LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |     |
|---------------------|-----|
| Lighting efficiency | 63% |
| Light beam angle    | 78° |

### LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Driver                      | Included                 |
| Power values of the system  | 8,84 W                   |
| Frequency                   | 50/60 Hz                 |
| Dimming                     | Phase Cut                |
| Electrical insulation class | <input type="checkbox"/> |


### OTHER DATA

|                           |                                                 |
|---------------------------|-------------------------------------------------|
| Sealing                   | IP20                                            |
| Recess measurements       | Ø62 mm                                          |
| Cord length               | 2600 mm                                         |
| Fast adjustment tensioner | No                                              |
| Weight                    | 2435 g                                          |
| Packaged weight           | 5800 g                                          |
| Packaging dimensions      | 980 x 970 x 100 mm                              |
| Units per package         | 1                                               |
| Materials                 | Aluminium / Polyamide / Polymethyl Methacrylate |




Warp emerges from a circumference of the horizontal plane and takes shape with true fluidity. Thanks to a translucent and elastic material such as textile, this suspension luminaire plays with the effects of translucency, offering great visual lightness and filtering the light through a defined contour. Available in black and in two different sizes, it is extremely quick and easy to assemble and lies flat in its packaging. Warp has been designed by the German studio Geckeler Michels.

POLAR DIAGRAM

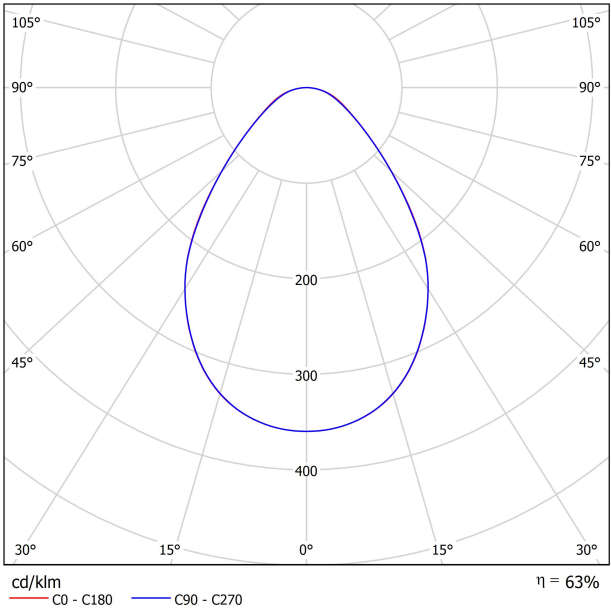

CONICAL DIAGRAM

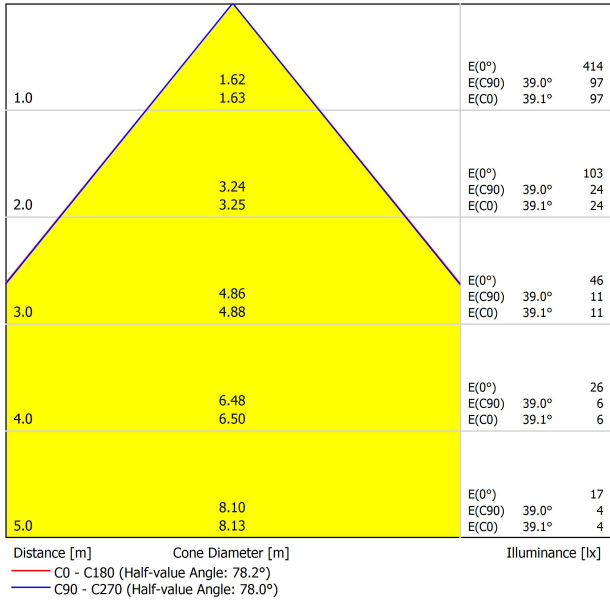




| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Mains Thick Trimless                                                                 |
| Reference | A023-00-02-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |



## DIMENSIONAL DRAWING





## INSTALLATION GUIDE

[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Model     | Trimless Tool <b>D20 X D52 MM</b> |
| Reference | A478-00-01                        |
| Category  | Accessories                       |





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

