




DIMENSIONS



ACCESSORIES



IP65 ACCESSORY



ADD-ON BEZEL

AWARDS



reddot design award
winner 2015



GERMAN
DESIGN
AWARD
NOMINEE
2016

PRODUCT

| | |
|-----------|---------------------------------|
| Name | SWAP S 7W DIM DALI/PUSH 3000K R |
| Reference | A2121231R |
| Color | Red |
| RAL | 2004 |
| Category | CEILING RECESSED |

LIGHT SOURCE

| | |
|------------------------|-----------------|
| Type | LED |
| Gross luminous flux | 940 lm |
| Colour temperature | 3000 K |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI >90 |
| Power | 7 W |
| Current | 200 mA |
| Efficacy | 134 lm/W |
| LED lifespan | L90B10 >55.000h |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|---------------------|-----|
| Lighting efficiency | 74% |
| Light beam angle | 33° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|-----------------------------|---|
| Driver | Included - Fast Connect |
| Power values of the system | 8,79 W |
| Frequency | 50/60 Hz |
| Dimming | DALI / Push - Other DIM, please consult |
| Electrical insulation class | □ |


OTHER DATA

| | |
|------------------------|---------------------------|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Emergency power supply | Please Consult |
| Impact resistance | IK07 |
| Recess measurements | Ø62 mm |
| Weight | 200 g |
| Packaged weight | 233,5 g |
| Packaging dimensions | 147 x 132 x 134 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |



Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.

POLAR DIAGRAM

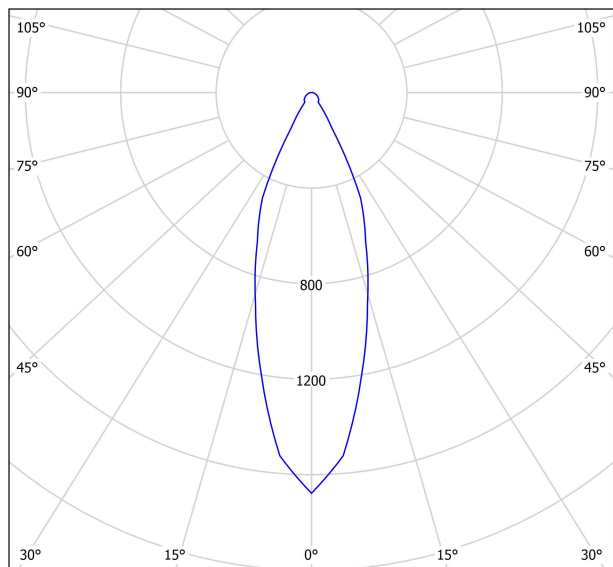

cd/klm
 — C0 - C180 — C90 - C270

η = 74%

CONICAL DIAGRAM

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-----|---|------|------|------|------|--|------|------|------|------|
| ρ Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
| ρ Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| ρ Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 18.1 | 19.0 | 18.4 | 19.2 | 19.4 | 18.1 | 19.0 | 18.4 | 19.2 | 19.4 |
| | 3H | 20.1 | 20.8 | 20.3 | 21.0 | 21.3 | 20.1 | 20.8 | 20.3 | 21.0 | 21.3 |
| | 4H | 20.9 | 21.6 | 21.2 | 21.8 | 22.1 | 20.9 | 21.6 | 21.2 | 21.8 | 22.1 |
| | 6H | 21.6 | 22.3 | 21.9 | 22.5 | 22.8 | 21.6 | 22.3 | 21.9 | 22.5 | 22.8 |
| | 8H | 21.9 | 22.6 | 22.3 | 22.8 | 23.2 | 21.9 | 22.6 | 22.3 | 22.8 | 23.2 |
| | 12H | 22.2 | 22.8 | 22.6 | 23.1 | 23.5 | 22.2 | 22.8 | 22.6 | 23.1 | 23.5 |
| 4H | 2H | 18.8 | 19.5 | 19.1 | 19.7 | 20.0 | 18.8 | 19.5 | 19.1 | 19.7 | 20.0 |
| | 3H | 20.9 | 21.5 | 21.3 | 21.8 | 22.1 | 20.9 | 21.5 | 21.3 | 21.8 | 22.1 |
| | 4H | 21.9 | 22.4 | 22.3 | 22.7 | 23.1 | 21.9 | 22.4 | 22.3 | 22.7 | 23.1 |
| | 6H | 22.8 | 23.2 | 23.2 | 23.6 | 24.0 | 22.8 | 23.2 | 23.2 | 23.6 | 24.0 |
| | 8H | 23.2 | 23.6 | 23.6 | 24.0 | 24.4 | 23.2 | 23.6 | 23.6 | 24.0 | 24.4 |
| | 12H | 23.6 | 23.9 | 24.0 | 24.3 | 24.8 | 23.6 | 23.9 | 24.0 | 24.3 | 24.8 |
| 8H | 4H | 22.3 | 22.7 | 22.7 | 23.1 | 23.5 | 22.3 | 22.7 | 22.7 | 23.1 | 23.5 |
| | 6H | 23.4 | 23.7 | 23.8 | 24.1 | 24.5 | 23.4 | 23.7 | 23.8 | 24.1 | 24.5 |
| | 8H | 23.9 | 24.2 | 24.4 | 24.6 | 25.1 | 23.9 | 24.2 | 24.4 | 24.6 | 25.1 |
| | 12H | 24.4 | 24.6 | 24.9 | 25.1 | 25.6 | 24.4 | 24.6 | 24.9 | 25.1 | 25.6 |
| 12H | 4H | 22.3 | 22.7 | 22.8 | 23.1 | 23.5 | 22.3 | 22.7 | 22.8 | 23.1 | 23.5 |
| | 6H | 23.5 | 23.8 | 24.0 | 24.2 | 24.7 | 23.5 | 23.8 | 24.0 | 24.2 | 24.7 |
| | 8H | 24.1 | 24.3 | 24.6 | 24.8 | 25.3 | 24.1 | 24.3 | 24.6 | 24.8 | 25.3 |
| | | | | | | | | | | | |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | | +0.2 / -0.1 | | | | | +0.2 / -0.1 | | | | |
| S = 1.5H | | +0.4 / -0.3 | | | | | +0.4 / -0.3 | | | | |
| S = 2.0H | | +0.6 / -0.6 | | | | | +0.6 / -0.6 | | | | |
| Standard table | | BK07 | | | | | BK07 | | | | |
| Correction Summand | | 5.9 | | | | | 5.9 | | | | |
| Corrected Glare Indices referring to 940lm Total Luminous Flux | | | | | | | | | | | |



IP20



IP65

| | PRODUCT |
|-----------|------------------|
| Model | IP65 Accessory S |
| Reference | A2121065 |
| Category | Accessories |

PRE-ASSEMBLED. NOT SOLD SEPARATELY.
AFFECTS THE LIGHTING PARAMETERS.



36°

To make the difference, Swap IP65 reaches a high sealing level, maintaining at the same time the same aesthetics as a standard Swap. The insulating property is obtained thanks to a protection placed just over the LED, and a silicone joint on the internal part of the bezel. In this way, the external aspect of Swap IP65 is identical to any other Swap IP20.

Swap offers the possibility of requesting any of its models with IP65-rated weather resistance, which converts it into an optimal luminaire to be installed in atmospheres where the product may suffer from the impact of water or frequent presence of humidity.



| | PRODUCT |
|----------|---------------------|
| Model | Swap S Add-On Bezel |
| Colour | W □ Matt white |
| Category | Accessories |



① 62-66


+

① 66-78

Accessory always included but for optional use.

It extends the piece's bezel to cover larger recesses, keeping Swap's minimalism and its perfect integration into the ceiling.

Easy to fit. Ideal for reforms to replace the light spot, with the already existing holes, without altering the ceiling or repainting. Swap is the best option for updating to LED technology by means of a real light fixture with incorporated LED, in contrast to just a retrofit lamp that only implies a less efficient update of the light source.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI


ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

