



## Dimensions



Name	REC DOUBLE DIM 4000K NT
Reference	A3090022NT
Colour	Textured black
RAL	9005
Category	WALL
Type	LED
Gross luminous flux	4560 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	29,5 W
Current	900 mA
Efficacy	155 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D
Lighting efficiency	63%
Light beam angle	103°
Driver	Included
Power values of the system	33,79 W
Frequency	50/60 Hz
Dimming	DALI / Push
Electrical insulation class	□
Sealing	IP20
Wireless control	Please Consult
Weight	1970 g
Packaged weight	2095 g
Packaging dimensions	408 x 145 x 64 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

## PRODUCT

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA


## LIGHTING FIXTURE | ELECTRICAL DATA

## OTHER DATA




Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminaire that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

Polar diagram

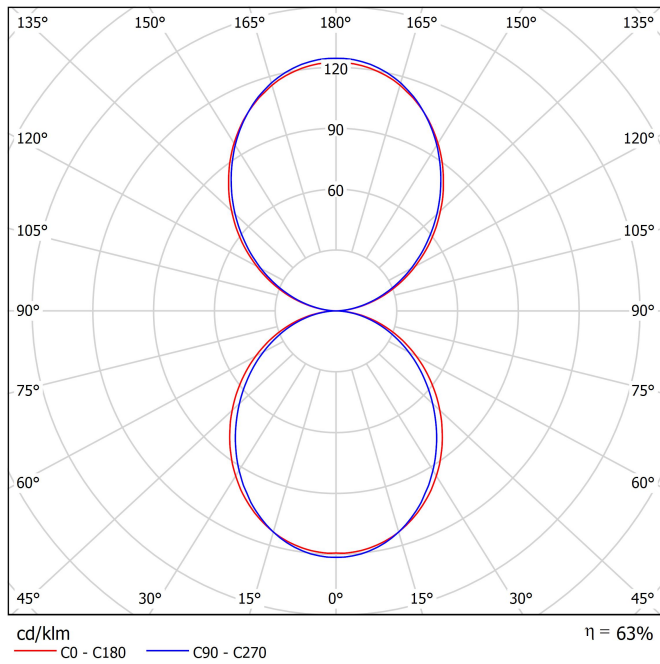

Conical diagram

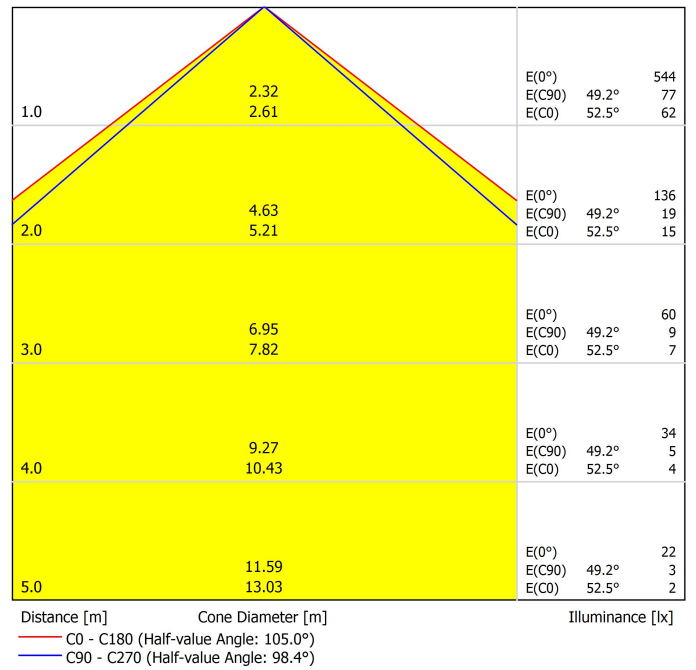



Fuente de luz (LED) reemplazable por un profesional autorizado  
 Replaceable (LED only) light source by an authorized professional.  
 Source lumineuse (LED) remplaçable par un professionnel agréé  
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
 Replaceable control gear by an authorized professional  
 Dispositif de commande remplaçable par un professionnel agréé  
 Alimentatore sostituibile da parte di un professionista autorizzato  
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

**Instrucciones para el final de vida y la eliminación de los componentes:**  
**Instructions on end-of-life and component disposal:**  
**Instructions pour la gestion des composants en fin de vie et leur mise au rebut :**  
**Istruzioni per il fine vita e lo smaltimento dei componenti:**  
**Anweisungen zur entsorgung der Leuchtenkomponenten:**



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

