




## Dimensions



## Accessories



ADD-ON BEZEL EXCLUDED.  
NOT COMPATIBLE.

## Awards



Name	SWAP S RT 2012 7W 4000K Z
Reference	A412121Z
Colour	Aluminium
RAL	9006
Category	CEILING RECESSED

Type	LED
Gross luminous flux	960 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	7 W
Current	200 mA
Efficacy	137 lm/W
LED lifespan	L90B10 >55.000h
Energy efficiency class	E

Lighting efficiency	73%
Light beam angle	36°


Driver	Included - Fast Connect
Power values of the system	8,25 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	<input type="checkbox"/>

Sealing	IP65
Impact resistance	IK07
Recess measurements	Ø62 mm
Weight	200 g
Packaged weight	233,5 g
Packaging dimensions	94 x 88 x 93 mm
Units per package	1
Materials	Aluminium / Polycarbonate
Compatible avec la norme française RT2012 & BBC	Oui. Recouvrable d'isolant déroulé.



Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.


## Polar diagram

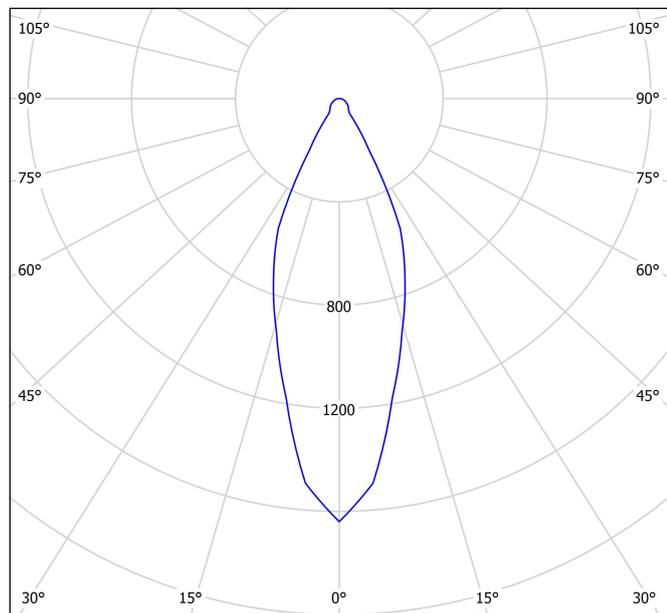

cd/klm  
 — C0 - C180 — C90 - C270

η = 81%

## Conical diagram

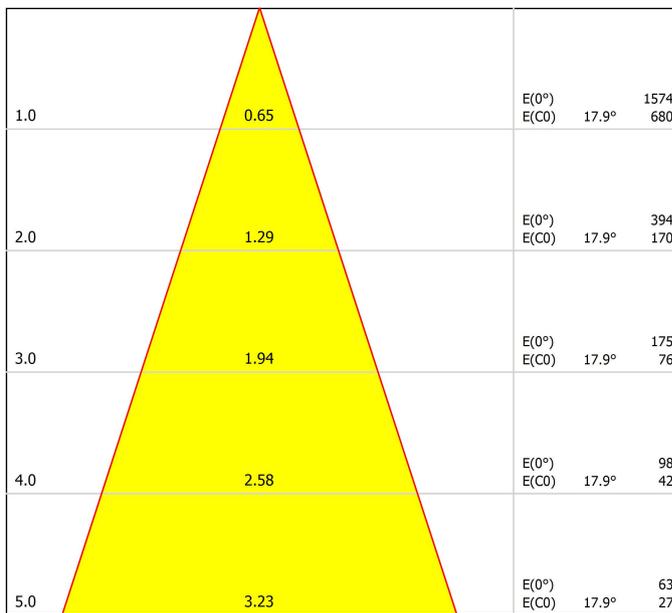

Distance [m] Cone Diameter [m]  
 — C0 - C180 (Half-value Angle: 35.8°)

Illuminance [lx]

## UGR

Glare Evaluation According to UGR												
p. Ceiling		70	70	50	50	30	70	70	50	50	30	
p. Walls		50	30	50	30	30	50	30	50	30	30	
p. Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	18.9	19.7	19.2	20.0	20.2	18.9	19.7	19.2	20.0	20.2	
	3H	20.9	21.6	21.1	21.8	22.1	20.9	21.6	21.1	21.8	22.1	
	4H	21.7	22.4	22.0	22.6	22.9	21.7	22.4	22.0	22.6	22.9	
	6H	22.4	23.1	22.7	23.3	23.6	22.4	23.1	22.7	23.3	23.6	
	8H	22.7	23.4	23.1	23.7	24.0	22.7	23.4	23.1	23.7	24.0	
4H	2H	19.6	20.3	19.9	20.5	20.8	19.6	20.3	19.9	20.5	20.8	
	3H	21.7	22.3	22.1	22.6	22.9	21.7	22.3	22.1	22.6	22.9	
	4H	22.7	23.2	23.1	23.6	23.9	22.7	23.2	23.1	23.6	23.9	
	6H	23.6	24.0	24.0	24.4	24.8	23.6	24.0	24.0	24.4	24.8	
	8H	24.0	24.4	24.4	24.8	25.2	24.0	24.4	24.4	24.8	25.2	
8H	2H	23.1	23.5	23.5	23.9	24.3	23.1	23.5	23.5	23.9	24.3	
	4H	24.2	24.5	24.6	24.9	25.4	24.2	24.5	24.6	24.9	25.4	
	6H	24.7	25.0	25.2	25.4	25.9	24.7	25.0	25.2	25.4	25.9	
	8H	25.2	25.4	25.7	25.9	26.4	25.2	25.4	25.7	25.9	26.4	
	12H	4H	23.1	23.5	23.6	23.9	24.3	23.1	23.5	23.6	23.9	24.3
6H		24.3	24.6	24.8	25.0	25.5	24.3	24.6	24.8	25.0	25.5	
8H		24.9	25.1	25.4	25.6	26.1	24.9	25.1	25.4	25.6	26.1	
12H		25.2	25.4	25.7	25.9	26.4	25.2	25.4	25.7	25.9	26.4	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.3 / -0.1					+0.3 / -0.1					
S = 1.5H		+0.6 / -0.4					+0.6 / -0.4					
S = 2.0H		+1.0 / -0.6					+1.0 / -0.6					
Standard table		BK07					BK07					
Correction Summand		7.0					7.0					
Corrected Glare Indices referring to 960lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado  
 Replaceable (LED only) light source by an authorized professional.  
 Source lumineuse (LED) remplaçable par un professionnel agréé  
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
 Replaceable control gear by an authorized professional  
 Dispositif de commande remplaçable par un professionnel agréé  
 Alimentatore sostituibile da parte di un professionista autorizzato  
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

